

Thermostatic Mixing Valve with Two-Way Diverter Trim - Round

FEATURES

- For use with MiniUnit™ (TBN01001U) Valve
- Unobtrusive twist assist for a clean aesthetic
- Meets 2018 California water efficiency appliance CEC regulations
- Thin escutcheon at approximately 10 mm
- Temperature control trim with anti-scald safety top
- ASSE certified Safety Thermo™ (SMA) Thermostatic Mixing Valve
- For use with showerheads rated at 1.75 gpm (6.6 lpm) or higher

COLORS/FINISHES

- #CP Polished Chrome
- #BN Brushed Nickel

Made to Order

- #PN Polished Nickel
- #PFG Polished French Gold
- #PBR Polished Bronze
- #MBL Matte Black

OPTIONAL ACCESSORIES

- **THP5466 (#\$\$)**
Thermostatic Mixing Valve ADA Handle
- **THP5467 (#\$\$)**
Volume Control/Diverter ADA Handle

Accessory COLORS/FINISHES

Optional accessory is available to match COLORS/
FINISHES section above

PRODUCT SPECIFICATION

Product shall be TOTO Model TBV01408U#____.
Product shall require TBN01001U MiniUnit (sold
separately). Product shall be a temperature control
valve and trim with anti-scald safety stop. Product shall
be ASSE certified.



Safety Thermo™ (SMA)

CODES/STANDARDS

- Meets or exceeds ASSE 1016/ASME A112.1016/
CSA B125.16, ASME A112.18.1/CSA B125.1
- Certifications: IAPMO(cUPC), State of
Massachusetts, City of Los Angeles, and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada,
CEC and others
- Complies with CA Prop 65 warning requirements



TBV01408U


Thermostatic Mixing Valve with Two-Way Diverter Trim - Round

SPECIFICATIONS


Material	Brass
Warranty	Limited Lifetime for Residential Use One Year for Commercial Use
Shipping Weight	5.9 lbs
Shipping Dimensions	12" x 8-1/2" x 6-3/8"

INSTALLATION NOTES

Requires TBN01001U MiniUnit (sold separately).

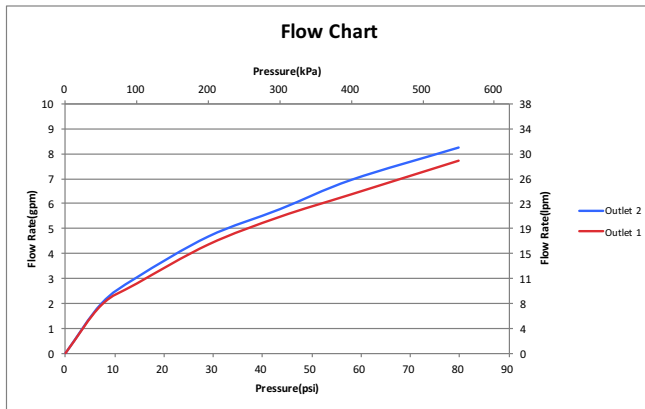

DIMENSIONS

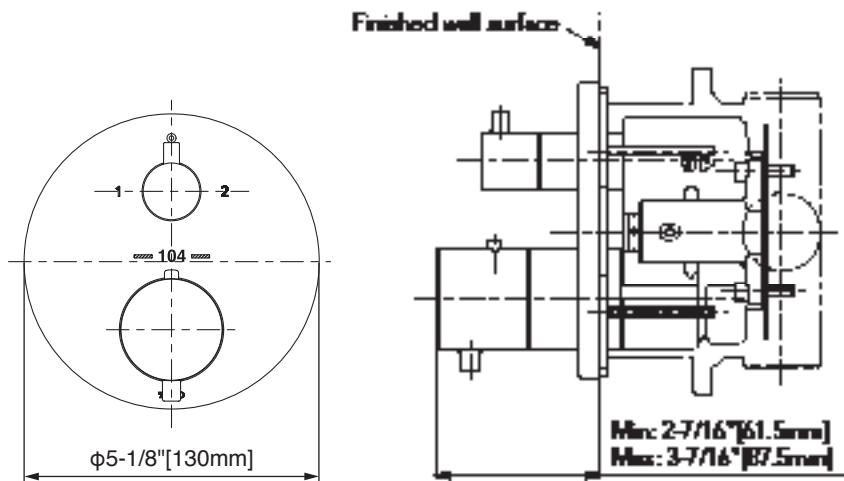

TOTO

Ph: (888) 295-8134 | Fax: (800) 699-4889 | www.totousa.com | © TOTO USA

These dimensions and specifications are subject to change without notice

#SS-01294 v.02