

Aquia® III Close Coupled Toilet, 1.6GPF & 0.9GPF

FEATURES

- Dual-Max® flushing system
- Extended skirt
- Universal Height
- Close coupled elongated front bowl and tank set, less seat
- Chrome push-button style flush option

MODELS

- CST464MF#01

COMPONENTS

- CT464F - Elongated Front Bowl
- ST464M - Tank and Cover only
- SS204 SoftClose® seat (sold separately)
- SS114 SoftClose® seat (sold separately)

COLORS/FINISHES

- Standard
#01 Cotton

PRODUCT SPECIFICATION

The two-piece low consumption Dual-Max flushing system toilet shall be 1.6GPF/0.9GPF. Toilet shall have a high-profile tank, elongated front bowl and chrome push-button type trip lever. Toilet shall be TOTO Model CST464MF#01.



DUALMAX®
FLUSHING SYSTEM BY TOTO

CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1, ASME A112.19.14
- Certifications: IAPMO(cUPC®), EPA WaterSensesm, State of Massachusetts, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative compliance: California Green Building Code, City of Los Angeles Water Efficiency Ordinance, and others



CST464MF



Aquia® III Close Coupled Toilet, 1.6GPF & 0.9 GPF

SPECIFICATIONS

- Water Use 1.6 GPF/0.9GPF (6.0 LPF/3.4LPF)
- Flush System Dual-Max®
- Min. Water Pressure 8 psi (static)
- Water Surface 6" x 4-1/2"
- Trap Diameter 2-1/8"
- Rough-in 12"
- Trap Seal 2-1/8"
- Warranty One Year Limited Warranty
- Material Vitreous china
- Shipping Weight CT464F - 78lbs
ST464M - 30lbs
- Shipping Dimensions CT464F 28-1/2"L x 15"W x 18"H
ST464M 16"L x 7"W x 17"H

INSTALLATION NOTES

Back-to-Back Toilet Installations:
TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

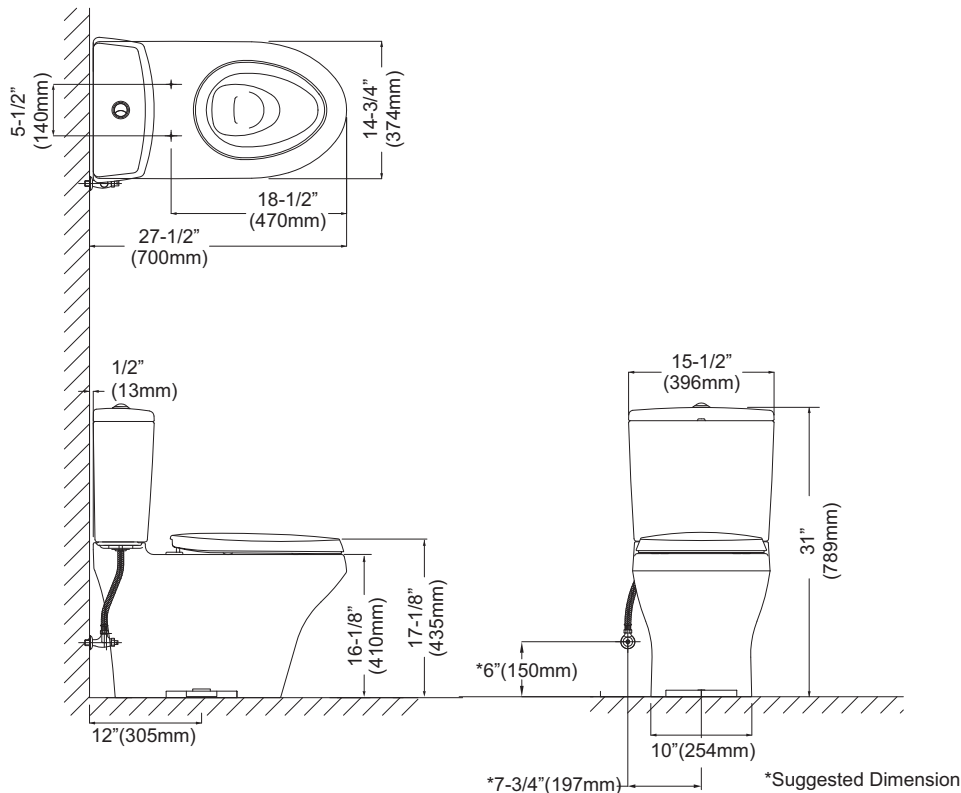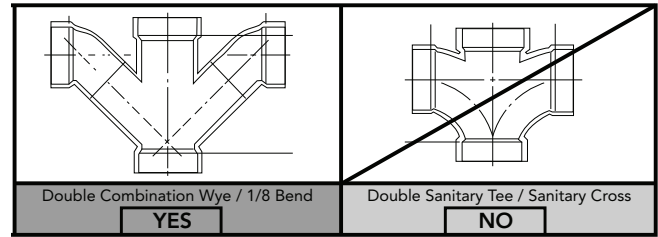

TOTO®

These dimensions and specifications are subject to change without notice