

TOTO®

WARRANTY

1. TOTO® warrants its products to be free from manufacturing defects under normal use and service for a period of one (1) year from the date of purchase. This warranty is extended only to the ORIGINAL PURCHASER.
2. TOTO®'s obligations under this warranty are limited to repair or replacement, at TOTO®'s option, of products or parts found to be defective, provided that such products were properly installed and used in accordance with OWNER'S MANUAL. TOTO® reserves the right to make such inspections as may be necessary in order to determine the cause of the defect. TOTO® will not charge for labor or parts in connection with warranty repairs or replacements. TOTO® is not responsible for the cost of removal, return and/or reinstallation of products.
3. This warranty does not apply to the following items:
 - a) Damage or loss sustained in a natural calamity such as fire, earthquake, flood, thunder, electrical storm, etc.
 - b) Damage or loss resulting from any unreasonable use, misuse, abuse, negligence, or improper maintenance of the product.
 - c) Damage or loss resulting from removal, improper repair, or modification of the product.
 - d) Damage or loss resulting from sediments or foreign matter contained in a water system.
 - e) Damage or loss resulting from improper installation or from installation of a unit in a harsh and/or hazardous environment.
4. This warranty gives you specific legal rights. You may have other rights, which vary from State to State.
5. To obtain warranty repair service under this warranty, you must take the product or deliver it prepaid to a TOTO® service facility together with a letter stating the problem, or contact a TOTO® distributor or products service contractor, or write directly to TOTO® U.S.A., INC., 1155 Southern road, Morrow, Georgia 30260, (888) 295-8134. If, because of the size of the product or nature of the defect, the product cannot be returned to TOTO®, receipt by TOTO® of written notice of the defect shall constitute delivery. In such case, TOTO® may choose to repair the product at the purchaser's location or pay to transport the product to a service facility.

THIS WRITTEN WARRANTY IS THE ONLY WARRANTY MADE BY TOTO. REPAIR OR REPLACEMENT AS PROVIDED UNDER THIS WARRANTY SHALL BE THE EXCLUSIVE REMEDY AVAILABLE TO THE PURCHASER. TOTO® SHALL NOT BE RESPONSIBLE FOR LOSS OF USE OF THE PRODUCT OR FOR OTHER INCIDENTAL, SPECIAL OR CONSEQUENTIAL DAMAGES OR EXPENSES INCURRED BY PURCHASER, OR FOR LABOR OR OTHER COSTS DUE TO INSTALLATION OR REMOVAL, OR COSTS OF REPAIRS BY OTHERS, OR FOR ANY OTHER EXPENSE NOT SPECIFICALLY STATED ABOVE. EXCEPT TO THE EXTENT PROHIBITED BY APPLICABLE LAW, ANY IMPLIED WARRANTIES, INCLUDING THAT OF MERCHANTABILITY OR FITNESS FOR USE, ARE EXPRESSLY LIMITED TO THE DURATION OF THIS WARRANTY. SOME STATES DO NOT ALLOW LIMITATIONS ON HOW LONG AN IMPLIED WARRANTY LASTS. OR THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATION AND EXCLUSION MAY NOT APPLY TO YOU.

Warning! TOTO® shall not be responsible or liable for any failure of, or damage to, this plumbing product or product component caused by either chloramines in the treatment of public water supply or in-tank bowl cleaners containing chlorine (calcium hypochlorite).

Note: The use of high concentration of chlorine or chlorine related products can seriously damage the fittings. This damage can cause leakage and serious property damage.

For more information, please call TOTO® Tech Support at (888) 295-8134.

TOTO®

1155 Southern Road
Morrow, GA 30260
770-282-8686

TOTO®


LLOYD™ LAVATORY & METAL CONSOLE

LF930MCP (LT930 + F930MCP)

LF930.4MCP (LT930 + F930.4MCP)

LF930.8MCP (LT930 + F930.8MCP)

INSTALLATION MANUAL

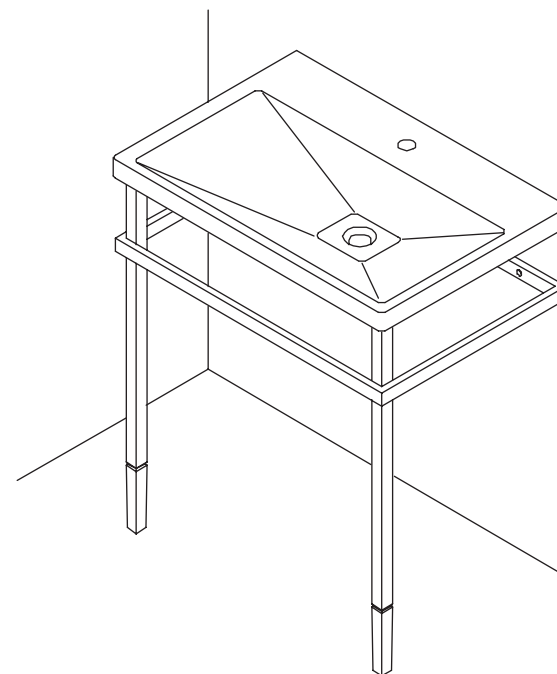

BEFORE INSTALLATION


If you are installing this product in a new construction or remodel, please make sure you are following all local plumbing and building codes. Carefully unpack and examine your new vanity for damage. To help insure that the installation process will proceed smoothly and correctly, please read these instructions carefully before you begin



Ignoring these symbols may cause personal injury and/or property damage

ROUGH-IN DIMENSIONS


- The washbasin, faucets, stop valve, and metal drain fittings need to be purchased separately.
- The "*" denotes the wood screw position. Prepare a reinforcing cross bar of 1-1/8" (30mm) or more in thickness.
- The "☆" mark the position of the anchor bolts.

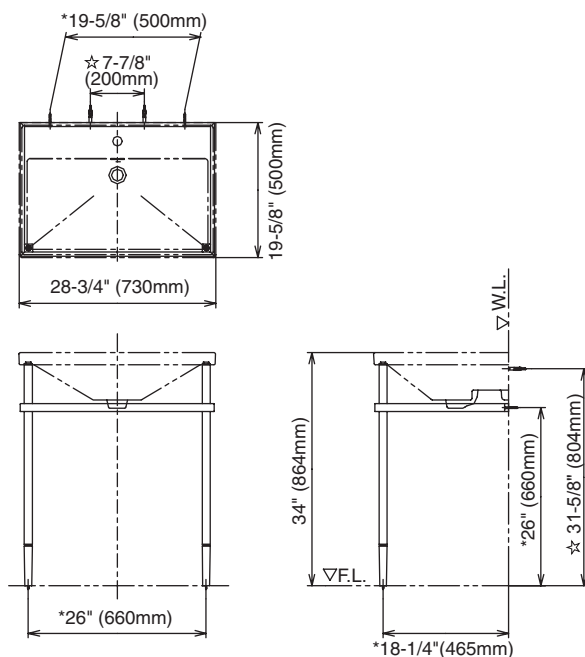

5

ATTACHMENT OF THE VANITY TO WALL


As shown in the figure below, attach vanity to the wall and ensure that frame remains horizontal. Also insure that the direction of the leg is the same as that of the foot.

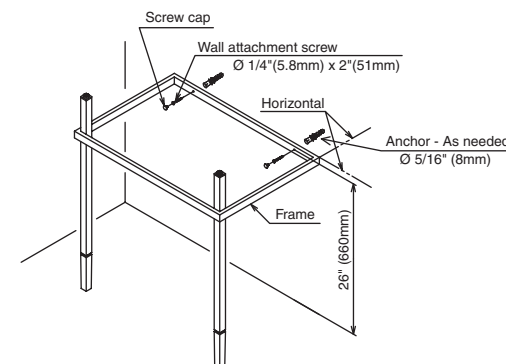

6

INSTALLATION OF THE LAVATORY

Install the Lavatory to the console as shown in the figure. Level the lavatory via adjustable spacers. Apply caulking between the lavatory and the spacers.

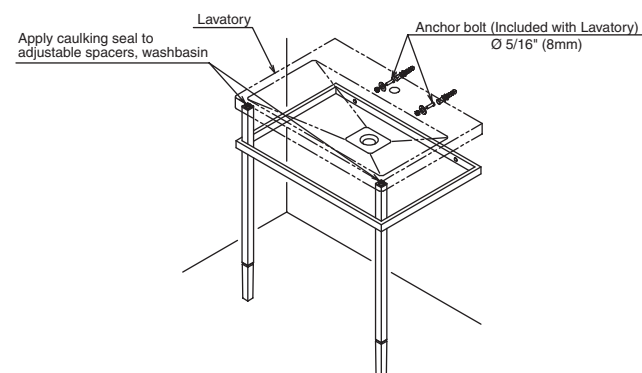


INSTALLATION CHECK

Ensure that the vanity is level and firmly attached to the wall and floor. Also make sure that there are no loose screws.
To clean the product, wipe using a well-wrung wet cloth. Only use a diluted neutral detergent for stubborn stains. Refer to owner manual for the detailed cleaning instructions.

3

INSTALLATION OF THE FEET


Install the feet to the adjustable spacer. Ensure that feet are level.

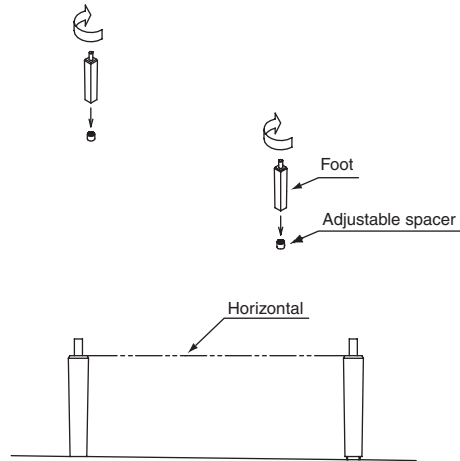


4

INSTALLATION OF THE LEG TO THE FEET


Install the holder (lower) and the leg to the foot. Install adjustable spacers on the leg. At that time, ensure that the adjustable spacer protrudes from the holder (upper) by 1/4" (6mm).

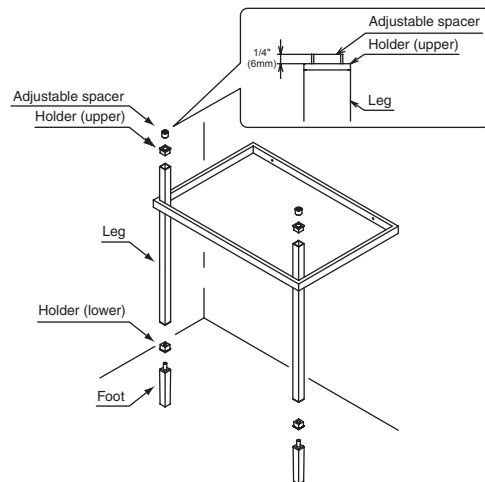






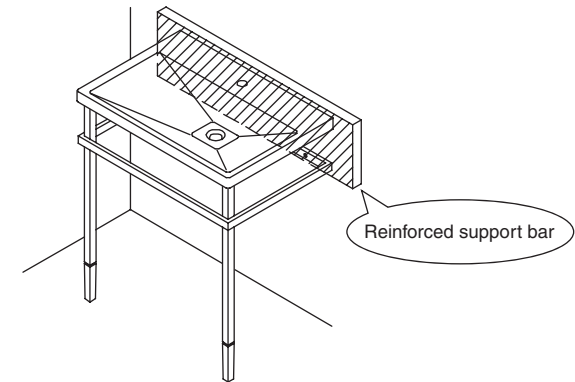






Adequate reinforcement is required in order to secure the vanity to the wall and floor.

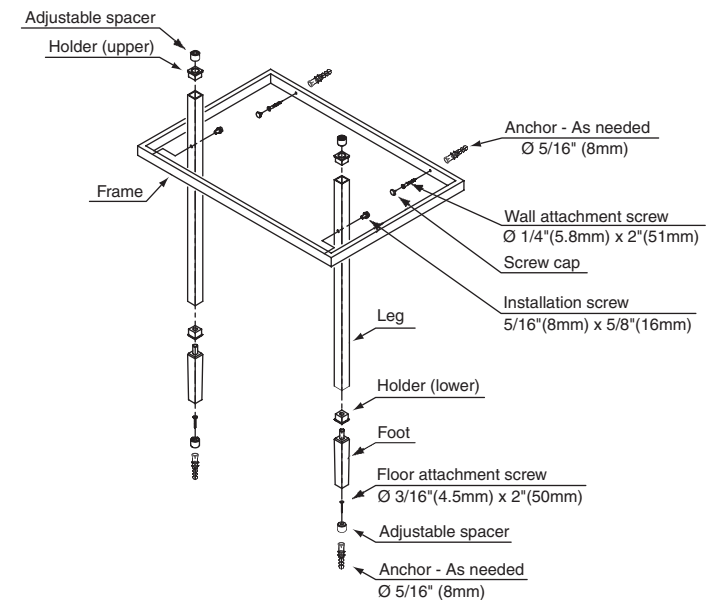

INSTALLATION DIAGRAM



PACKAGING LIST

Template (Qty=1)	Frame (Qty=1)	Holder (upper) (Qty=2)	Holder (lower) (Qty=2)
			
Leg (Qty=2)	Foot (Qty=2)	Owner's manual (Qty=1)	Installation screw (Qty=2)
			
Adjustable spacer (Qty=4)	Floor attachment screw & Anchor (Qty=2)	Screw Cap (Qty=2)	Wall attachment screw & Anchor (Qty=2)
			




Warning

- Provide adequate reinforcement at the vanity's wall and floor attachment points. Install anchor bolts at specified locations.
- To maintain prolong beauty of the finish, avoid installing vanity in direct sunlight, as sunlight causes fading.
- For the installation of the faucet and metal drain fittings, read the respective installation instructions for those items.
- Use the protective sheets to avoid scratches.

1

INSTALLATION OF ADJUSTABLE SPACER

Using the template, install adjustable spacer to the floor.

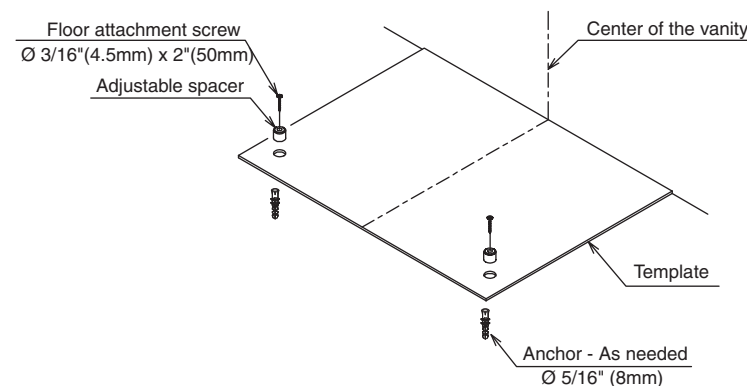

2

INSTALLATION OF FRAME

Install the legs on the frame as shown in the figure below.

