Aquia® One-Piece Toilet, 1.6GPF & 0.9GPF

FEATURES

- Dual-Max® flushing system, high efficiency (1.6GPF/6.0LPF & 0.9GPF/3.4LPF)
- Elongated skirt
- Universal Height
- One-piece elongated toilet with SS114 seat
- Dual flush option
- Chrome push-button
- 12" rough-in

MODELS

 MS654114MF - Elongated One-Piece Toilet with SS114 SoftClose® seat

COLORS/FINISHES

Standard #01 Cotton #03 Bone #11 Colonial White #12 Sedona Beige #51 Ebony

PRODUCT SPECIFICATION

The one-piece, universal height, high efficiency dual-max flushing system toilet shall be 1.6GPF/0.9GPF. Toilet shall have high-profile tank, elongated front bowl and chrome push-button. Toilet shall be TOTO Model MS654114MF____.





CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1, ASME A112.19.14
- Certifications: IAPMO(cUPC®), EPA WaterSense, State of Massachusetts, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative compliance: California Green Building Code, City of Los Angeles Water Efficiency Ordinance, and others



Aquia® One-Piece High-Efficiency Toilet, 1.6GPF & 0.9 GPF

SPECIFICATIONS

• Water Use 1.6 GPF & 0.9 GPF (6.0 LPF & 3.4 LPF)

Flush System Dual-Max
Min. Water Pressure 8 psi (flowing)
Water Surface 5-1/4" x 4-1/4"

Trap Diameter 1-3/4"Rough-in 12"Trap Seal 2-1/4"

• Warranty One Year Limited Warranty

Material Vitreous china

• Shipping Weight MS654114MF - 112lbs


Shipping Dimensions MS654114MF

32" L x 19-7/8" W x 29-1/4" H


INSTALLATION NOTES

Back-to-Back Toilet Installations:

TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.



To maintain adequate wall gap between the back of the tank and wall, mount the floor flange at a nominal 12" rough-in distance.

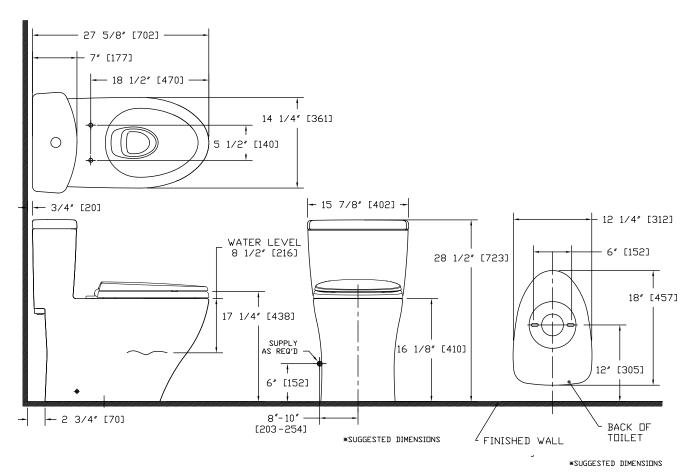

TOTO_®

These dimensions and specifications are subject to change without notice