TOTO_® SW532

Washlet® B150

FEATURES

- Gentle Aerated, Warm Water, Dual Action Spray with oscillating and pulsating feature
- Adjustable water temperature and volume
- Convenient slim wireless remote, with illuminated touch pad.
- 2 user setting
- Docking Station Easy to Install and Clean
- Heated Seat with Temperature Control



MODELS

SW532- Elongated front

COLORS/FINISHES

Standard #01 Cotton

PRODUCT SPECIFICATION

Seat shall be model # SW532_

Seat shall have gentle aerated, warm water, dual action spray with cycling movement and massage feature. Seat shall have adjustable water temperature and volume. Seat shall include wireless remote control. Seat shall be solid plastic with closed front seat and cover. Seat shall include power cord, and water supply hoses.

CODES/STANDARDS

- Meets and exceeds ASME A112.4.2, ASME A112.18.1/CSA B125.1, UL 1431, CSA C22.2 #68
- Certifications: IAPMO(cUPC), State of Massachusetts, City of Los Angeles and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others



Washlet® B150

SPECIFICATIONS

• Power Rating: AC 120V-60Hz, 318W

Power Cord: Maximum length:

3.94 ft/120 cm, 3 prong • S

grounded plug

Water Feature: Adjustable Water

Flow Rate:

Front washing - 9.1 -

20.3 oz/min

Rear washing 9.8 -

20.3 oz/min

Soft Rear - from 9.8 -

18.6 oz/min

Washing Spray Temp: Minimum: 86°F/30°C

Maximum: 104°F/40°C

• Seat Warming Feature: Surface Temperature:

Minimum: 82°F/28°C Maximum: 97°F/36°C

• Safety Device: Thermal fuse

• Water Supply Pressure: Minimum: 7.25 psi

Maximum: 108.75 psi

• Ambient Temperature: Range:

32°F/0°C to 104°F/40°C


• Warranty: One Year Limited Warranty


Shipping weight: 13.5lbs.

• Shipping dimensions: 20" x 23-1/2" x 9"

INSTALLATION NOTES

- Washlet B150 may not fit certain toilet bowl designs.
- If possible, with your order, please include your model number (from the underside of the tank lid).
- It is highly recommended to use a surge protector to prevent damage in the event of a power surge.

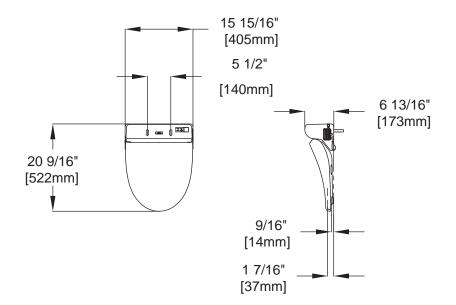



TOTO_®

These dimensions and specifications are subject to change without notice