## **TOTO**<sub>®</sub>

# **UT104EX**

## 0.5GPF Low Consumption Washout Urinal

#### FEATURES

- 0.5GPF
- Compact urinal with concealed integral trap
- Washout flush action with 3/4" top spud inlet
- Designed for reclaimed water use

#### MODELS

• UT104EX Urinal with 3/4" top spud inlet

#### ADDITIONAL ITEMS

• THU3010 Stainless Steel Urinal Drain Cover

#### EcoPower<sup>®</sup> Flush Valves (0.5 GPF)

Exposed

TEU1LAX12#CP

#### COLORS/FINISHES

• Standard #01 Cotton

#### PRODUCT SPECIFICATION

The wall-mounted, ADA compliant, low consumption washout urinal shall be 0.5GPF/1.9LPF when paired with a 0.5GPF flushometer valve. Urinal specified shall be model UT104EX\_\_\_\_\_.



#### CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1,
- Certifications: IAPMO(cUPC), State of Massachusetts
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- ADA compliant



#### 0.5GPF Low Consumption Washout Urinal

#### **SPECIFICATIONS**

| Water Use            | 0.5GPF/1.9LPF                 |  |
|----------------------|-------------------------------|--|
| Flush System         | Washout flush action          |  |
| Warranty             | One Year Limited Warranty     |  |
| Material             | Vitreous China                |  |
| Min. Water Pressure  | 15 psi (Flowing)              |  |
| Height (Urinal Only) | 21-3/4"                       |  |
| Width                | 13"                           |  |
| Rim                  | 14"                           |  |
| Shipping Weight      | 34.5lbs                       |  |
| Shipping Dimensions  | 24" L x 13-3/4" W x 15-1/8" H |  |

#### INSTALLATION NOTES


| RECLAIMED WATER QUALITY PARAMETERS |                |  |
|------------------------------------|----------------|--|
| Chloride Ion Concentration         | < 600mg/L      |  |
| рН                                 | 5.8~8.6        |  |
| Free Carbonate                     | < 50mg/L       |  |
| Langelier's Index                  | > -3.00        |  |
| Nitrate Ion Concentration          | < 60mg/L       |  |
| Conductivity                       | < 250mS/m      |  |
| Sulfate Ion Concentration          | < 100mg/L      |  |
| Residual Chlorine Concentration    | < 2mg/L        |  |
| Hydrogen Sulfide Gas               | None Existance |  |
| Suspended Solids                   | < 5mg/L        |  |
|                                    |                |  |

Adjust angle stop accordingly to prevent overflow. Confirm with local codes and standards for floor drain requirement.

TOTO Reclaimed Water flush valves are designed to perform best when used with TOTO Reclaimed Water urinals/toilets and components. Although TOTO Reclaimed Water products may be used in combination with other reclaimed water product brands, optimal performance might be impaired and attempted use with any non-compliant reclaimed water product(s) could result in corrosion, leakage or void the warranty.

#### DIMENSIONS



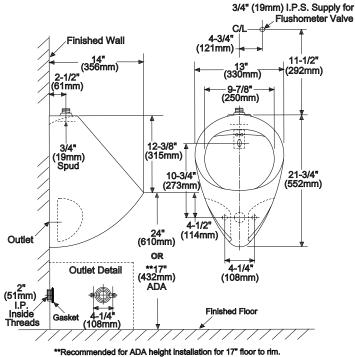

### TOTO

These dimensions and specifications are subject to change without notice