

## Neorest 550 Elongated Toilet/Bidet

## FEATURES

- Tornado Flush™ siphon jet flushing system, low consumption (1.05GPF/4.0LPF and 1.6GPF/6.0LPF)
- CeFiONtect™ ceramic glaze - prevents debris and mold from sticking to ceramic surfaces, leading to fewer chemicals and less water in cleaning.
- Auto lid open/close, auto flush
- Convenient remote control
- Adjustable heated seat
- Adjustable spray position
- Washlet with three wash modes (front, rear, soft)
- Oscillating and pulsing comfort washing
- Energy saver timer
- Built-in air purifying system

## MODELS

- MS980CMG  
With CeFiONtect ceramic glaze

## COLORS/FINISHES

- #01 Cotton
- #11 Colonial White
- #12 Sedona Beige

## PRODUCT SPECIFICATION

The Neorest 550 uses our Tornado Flush system toilet shall be 1.02GPF/4.0LPF and 1.6GOF/6.0LPF. Toilet shall have CeFiONtect ceramic glaze. Toilet shall be of skirted design, elongated front bowl with auto open and close seat. Toilet shall be TOTO Model MS980CMG\_\_\_\_\_.



 CeFiONtect

 Tornado Flush

## CODES/STANDARDS

- Meets and exceeds ASME A112.4.2, ASME A112.19.2/CSA B45.1, ASME A112.18.1/CSA B125.1, UL 1431, CSA C22.2 # 68
- Certifications: IAPMO(cUPC), Intertek, State of Massachusetts, City of Los Angeles and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others



# MS980CMG

## Neorest 550 Elongated Toilet/Bidet

### SPECIFICATIONS

Water Use: 1.6 Gpf/6.0 Lpf with alternate 1.05 Gpf/4.0 Lpf  
 Flush System: Tornado Flush™ Siphon Jet  
 Water Supply: Min 8.7gal/min (33L/min) before installation  
 Max 80PSI (0.55MPa) static  
 Water Surface: 10-13/16" x 8-7/16"  
 Trap Diameter: 2-1/8" (54 mm)  
 Rough In: 12" rough in  
 Warning: If there is a base board in the restroom, the center of the floor drain should be a minimum of 12" from the base board.

Trap Seal: 2-7/16" (62 mm)



Warranty: Three Year Limited (Residential)  
 One Year Limited (Commercial)

Material: Bowl: Vitreous china  
 Seat and cover: Plastic

Shipping Weight: 112 lbs.

Shipping Dimensions: 21" x 31" x 34"

Accessories: Sound Experience - THU9201  
 Connection Unit - THU9202#XX

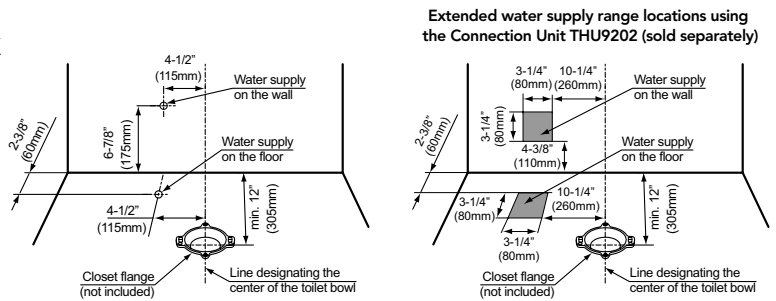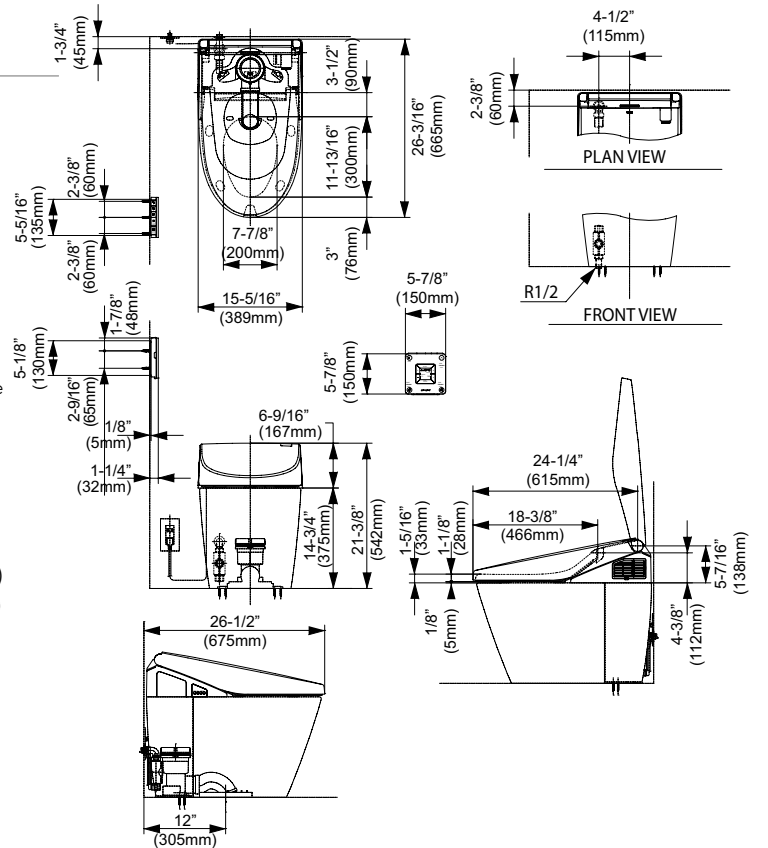

Power Rating: 120V AC, 60 Hz.1284W  
 Power Cord: Maximum length: 3 ft (914 mm)  
 Water Feature: Adjustable Water Flow Rate  
 Rear washing: from 9.1 to 14.5 oz/min.  
 Soft washing: from 9.1 to 14.5 oz/min.  
 Front washing: from 9.8 to 14.5 oz/min.  
 Temperature of Washing Spray  
 Minimum: 86° F/30° C  
 Maximum: 104° F/40° C  
 Safety Features: Temperature fuse, Bi-metal sensor (auto reset), and Float switch (prevent boil)  
 Drying Feature: Air Temperature:  
 High: About 138°F/59°C  
 Medium: About 122°F/50°C  
 Low: About 104°F/40°C  
 Capacity of Air: 10.6 ft³/min  
 Safety Feature: Temperature Fuse

Seat Warming Feature: Surface Temperature:  
 Minimum: 82° F/28° C  
 Maximum: 97° F/36° C  
 Seat Heater Capacity: 50W  
 Safety Feature: Thermal fuse  
 Air Purifying Feature: Method: 0 Deodorizer  
 Air Volume: 5.5 ft³/min  
 Ambient Temperature Range: 33°F/1°C to 104°F/40°C  
 Size: 15.3" x 25.2" x 21.3"  
 Weight: Net: 82.7 lbs.

These dimensions and specifications are subject to change without notice