

Soirée® 5 Hole Deck Bath Valve

FEATURES

- Corrosion resistant
- Ceramic disk valve cartridge
- For use with the TB960S 5 hole deck bath trim

CODES/STANDARDS

- Meets or exceeds ASME A112.18.1/CSA B125.1
- Certifications: IAPMO(cUPC), State of Massachusetts, City of Los Angeles, and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others



PRODUCT SPECIFICATION

The 5 hole deck back valve shall be corrosion resistant. Deck bath valve shall have ceramic disk valve cartridge. Deck bath valve shall be TOTO Model TB6F.

TB6F


Soirée® 5 Hole Deck Bath Valve

SPECIFICATIONS

- Warranty Lifetime Limited Warranty (Residential Use)
One Year (Commercial Use)
- Material Brass
- Shipping Weight 12.4 lbs.
- Shipping Dimensions 20-3/4" L x 9-3/4" W x 3-3/4" H

INSTALLATION NOTES

FAUCET TRIM REQUIRED:
Soirée® 5 hole deck bath trim, model TB960S#CP sold separately.

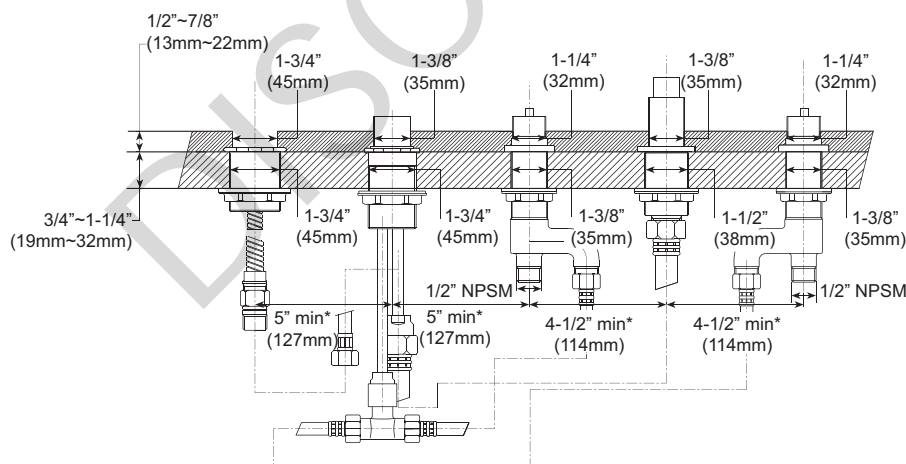

IMPORTANT NOTE: This valve/trim can only be installed in a built-up deck. It cannot be installed on pre-finished deck or on tub rim.

TOTO®

These dimensions and specifications are subject to change without notice

Ph: (888) 295-8134 | Fax: (800) 699-4889 | www.totousa.com

SS-00062, v.02
Printed in U.S.A. | © TOTO USA 10/09 | Printed on recycled paper ♻