

Guinevere® Thermostatic Mixing Valve Trim

FEATURES

- Temperature control trim with anti-scald safety stop at 108°F
- For use with Thermostatic Mixing Valve (TSTT)

COLORS/FINISHES

- #CP Polished Chrome
- #BN Brushed Nickel
- #PN Polished Nickel
- #RB Oil Rubbed Bronze

CODES/STANDARDS

- Meets or exceeds ASME A112.18.1/CSA B125.1, ASSE 1016
- Certifications: IAPMO(cUPC), State of Massachusetts and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others



PRODUCT SPECIFICATION

Thermostatic mixing valve trim shall have temperature control trim with anti-scald safety stop at 108°F. Product shall have a lever handle. Product shall be TOTO Model TS970T#____ and required thermostatic mixing valve shall be TSTT sold separately.

TS970T


Guinevere® Thermostatic Mixing Valve Trim

SPECIFICATIONS

- Warranty
Lifetime Limited Warranty (Residential Use)
One Year (Oil Rubbed Bronze)
One Year (Commercial Use)
- Material
Brass
- Shipping Weight
5.3 lbs.
- Shipping Dimensions
12-1/2" L x 10-3/4" W x 3-1/2" H

INSTALLATION NOTES

VALVE REQUIRED:
3/4" Thermostatic mixing valve, model TSTT sold separately.

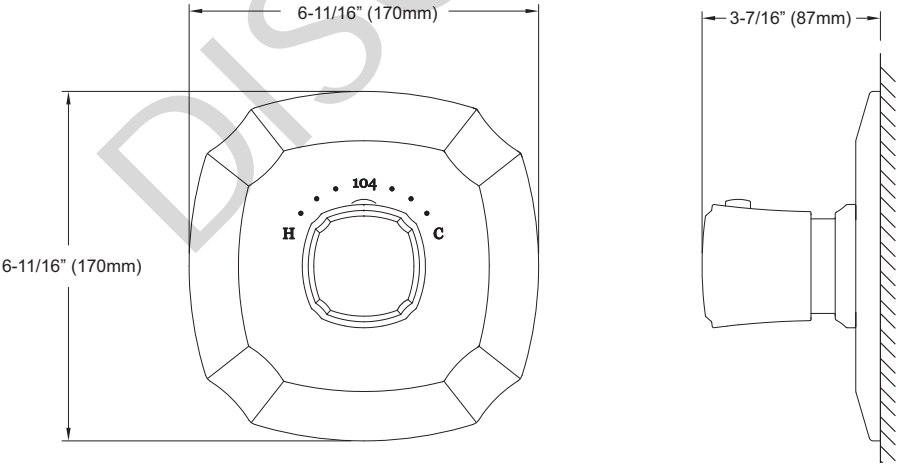

TOTO®

These dimensions and specifications are subject to change without notice