

TOTO®

MS854114/MS853113

Ultimate® One-Piece Toilet, 1.6GPF

FEATURES

- Power Gravity® flushing system (1.6GPF/6.0LPF)
- One-piece decorative toilet with low-profile tank
- Chrome trip lever
- Elongated front bowl with SoftClose® seat (SS114) or round front bowl with SoftClose seat (SS113)
- 12" Rough-in

MODELS

- MS854114
Elongated bowl with SoftClose seat (SS114)
- MS853113
Round bowl with SoftClose seat (SS113)

OPTIONAL COMPONENTS

- **THU808(#01, #03, #11, #12, #51, #BN, #PN, #PB, #RB, #MBL)-A**
Trip Lever - Cotton, Bone, Colonial White, Sedona Beige, Ebony, Brushed Nickel, Polished Nickel, Polished Brass, Oil Rubbed Bronze, Matte Black

COLORS/FINISHES

- Standard
 - #01 Cotton
 - #03 Bone
 - #11 Colonial White
 - #12 Sedona Beige

PRODUCT SPECIFICATION

The one-piece Power Gravity flushing system toilet shall be 1.6GPF/6.0LPF. Toilet shall be of elongated front bowl (MS854) or round front bowl (MS853) with a low-profile tank and SoftClose seat. Toilet shall have chrome trip lever. Toilet shall be TOTO Model MS854114_____ (elongated), MS853113_____ (round).



CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC), State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- Complies with CA Prop 65 warning requirements



MS854114/MS853113


Ultimate® One-Piece Toilet, 1.6GPF

SPECIFICATIONS


- Water Use 1.6 GPF/6.0LPF
- Flush System Power Gravity®
- Min. Water Pressure 8 psi (static)
- Water Surface 10-1/4" x 8-1/4"
- Trap Diameter 2-1/8"
- Rough-in 12"
- Trap Seal 2-1/4"
- Warranty One Year Limited Warranty
- Material Vitreous china
- Shipping Weight MS854114 91 lbs.
MS853113 93lbs.
- Shipping Dimensions 29-1/2" L x 18" W
x 19-1/4" H1 x 27-1/8" H2

INSTALLATION NOTES

Back-to-Back Toilet Installations:
TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

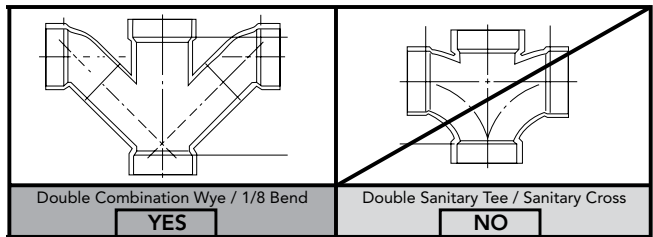

To maintain adequate wall gap between the back of the tank and wall, mount the floor flange at a nominal 12" rough-in distance.

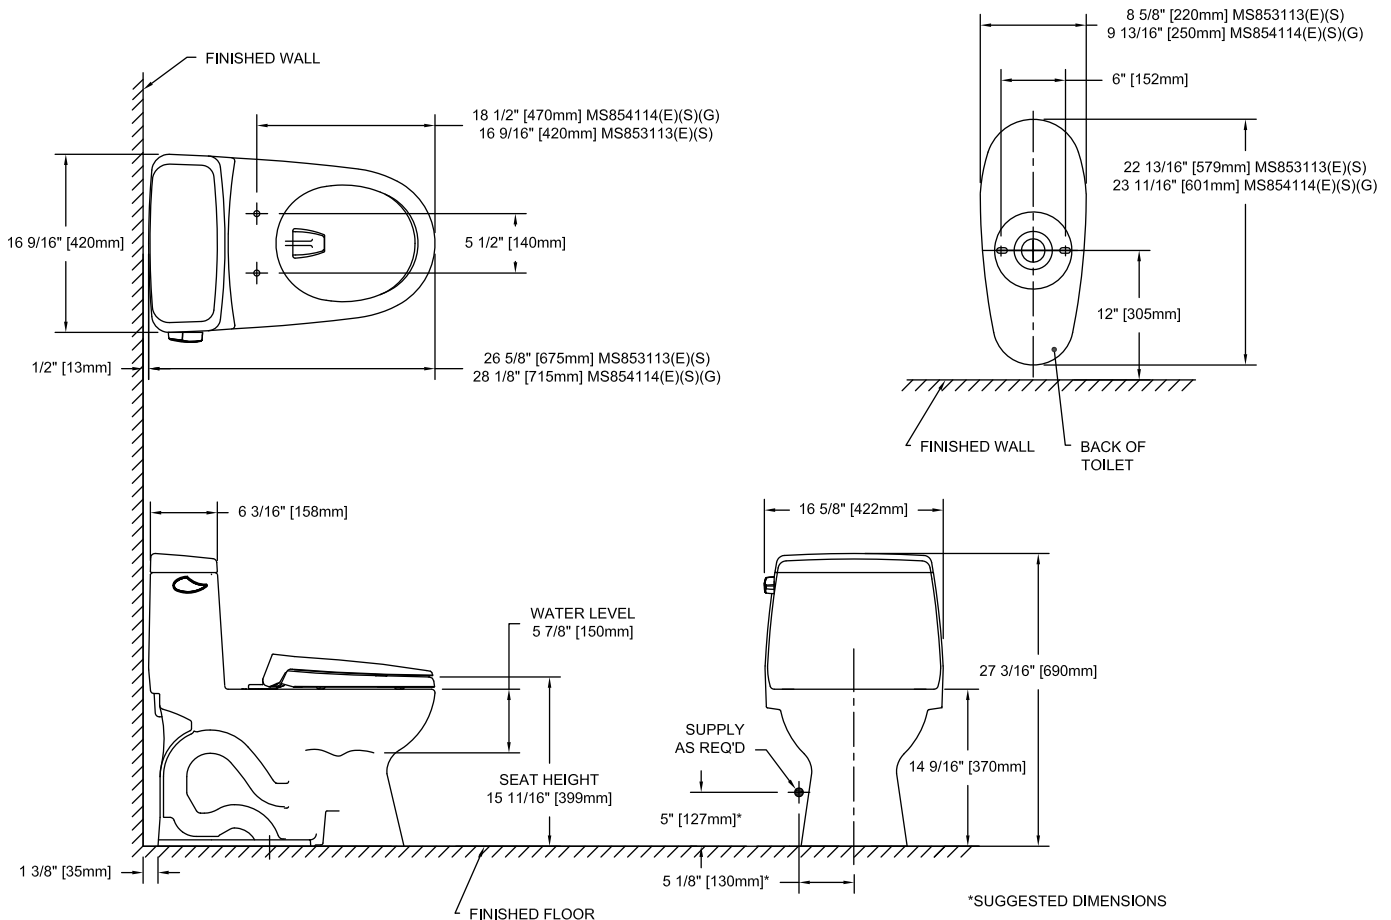

TOTO®

These dimensions and specifications are subject to change without notice