

# TOTO®

# MS864114E/MS863113E

## Eco Supreme® One-Piece Toilet, 1.28GPF

### FEATURES

- E-Max® flushing system, high efficiency (1.28GPF/4.8LPF)
- One-piece decorative toilet with low-profile tank
- Elongated front bowl with SoftClose® seat (SS114) or round front bowl with SoftClose seat (SS113)
- 12" Rough-in
- Chrome trip lever

### MODELS

- MS864114E  
Elongated bowl with SoftClose seat (SS114)
- MS863113E  
Round bowl with SoftClose seat (SS113)

### COLORS/FINISHES

- Standard
  - #01 Cotton
  - #03 Bone
  - #11 Colonial White
  - #12 Sedona Beige



**E+** E-Max

### PRODUCT SPECIFICATION

The one-piece high efficiency E-Max flushing system toilet shall be 1.28GPF/4.8LPF. Toilet shall be of elongated front bowl (MS864) or round front bowl (MS863) with a low-profile tank and SoftClose seat. Toilet shall have chrome trip lever. Toilet shall be TOTO Model MS864114E\_\_\_\_\_ (elongated), MS863113E\_\_\_\_\_ (round).

### CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC), EPA Watersense, State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance



# MS864114E/MS863113E


## Eco Supreme® One-Piece Toilet, 1.28GPF

### SPECIFICATIONS


- Water Use 1.28 GPF/4.8LPF
- Flush System E-Max®
- Min. Water Pressure 8 psi (static)
- Water Surface 10-1/4" x 8-1/4"
- Trap Diameter 2-1/8"
- Rough-in 12"
- Trap Seal 2-1/4"
- Warranty One Year Limited Warranty
- Material Vitreous china
- Shipping Weight MS864114E 89 lbs.  
MS863113E 85 lbs.
- Shipping Dimensions 29-1/2" L x 18" W  
x 19-1/4" H1 x 27-1/8" H2

### INSTALLATION NOTES

Back-to-Back Toilet Installations:  
TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

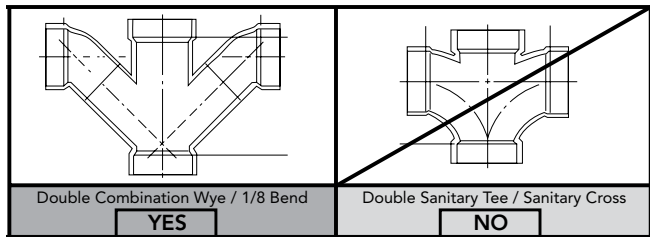

To maintain adequate wall gap between the back of the tank and wall, mount the floor flange at a nominal 12" rough-in distance.

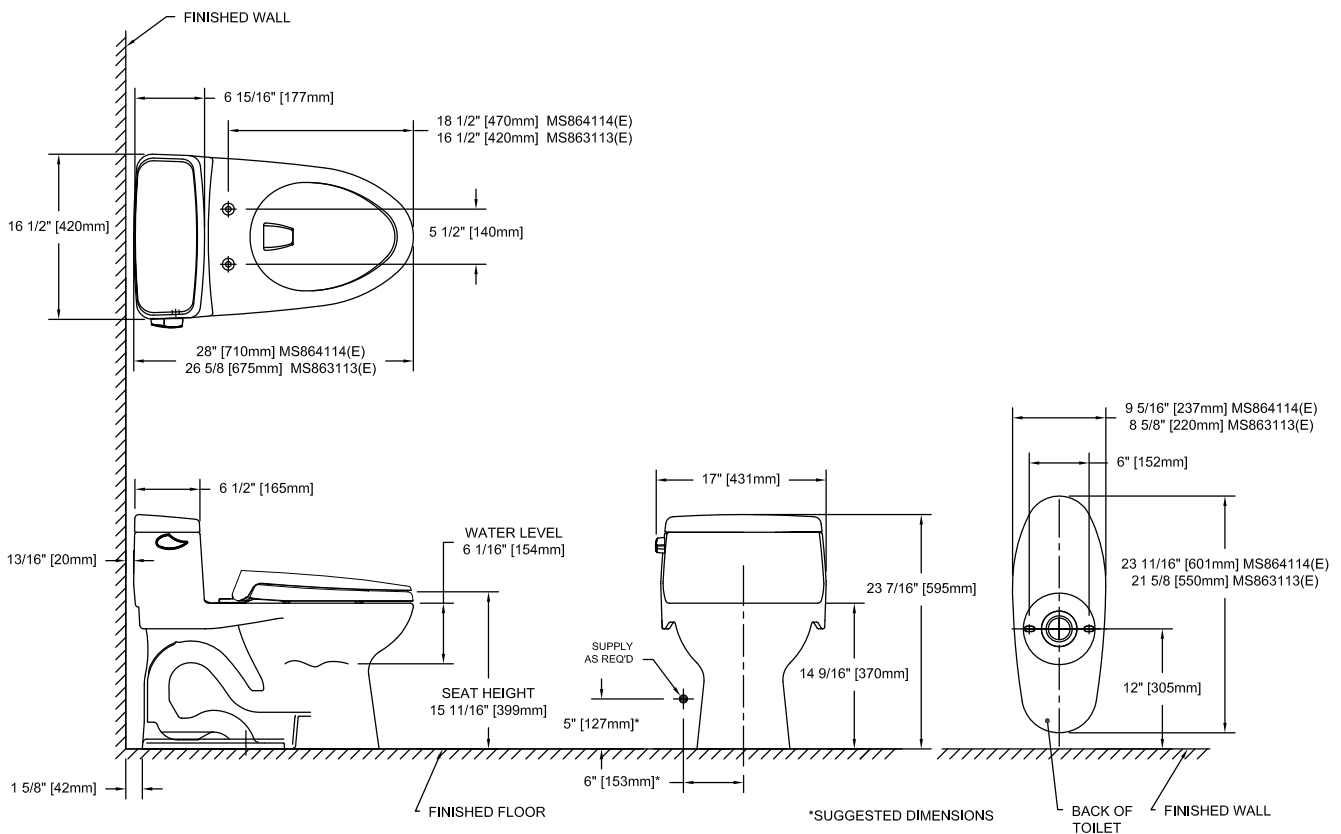

**TOTO®**

*These dimensions and specifications are subject to change without notice*