

## Flushometer Toilet, 1.28GPF when used with High Efficiency Flushometer Valve

### FEATURES

- Floor-mounted
- Elongated front bowl
- Optional CeFiONtect™ ceramic glaze - prevents debris, mold and bacteria from sticking to ceramic surfaces, leading to fewer chemicals and less water in cleaning.
- Clear glazed trapway coating
- 10"-12" rough-in

### MODELS

- CT705ENG  
Commercial floor-mounted toilet with CeFiONtect ceramic glaze
- CT705EN  
Commercial floor-mounted toilet

### ADDITIONAL ITEMS

- SC534 seat
- SC134 seat

| FLUSH VALVES |         |             |         |
|--------------|---------|-------------|---------|
| EcoPower®    |         | Manual      |         |
| *TET1LA32#CP | 1.28GPF | TMT1LN32#CP | 1.28GPF |
| TET1GA32#CP  | 1.6GPF  | TMT1NNC-32  | 1.6GPF  |
| *TET2LA32#SS | 1.28GPF |             |         |
| TET2GA32#SS  | 1.6GPF  |             |         |
| *TET3LA32#SS | 1.28GPF |             |         |
| TET3GA32#SS  | 1.6GPF  |             |         |
| *TET6LA32#CP | 1.28GPF |             |         |
| TET6GA32#CP  | 1.6GPF  |             |         |

\*WaterSense listed

### COLORS/FINISHES

- Standard  
#01 Cotton



### PRODUCT SPECIFICATION

The floor-mounted, low consumption siphon jet flushing toilet shall be 1.28GPF/4.8LPF when paired with a 1.28GPF flushometer valve and 1.6GPF/6.0LPF when paired with 1.6GPF/6.0LPF flushometer valve. Toilet shall be elongated front bowl and CeFiONtect ceramic glaze (CT705ENG). Toilet shall be TOTO Model CT705E\_\_\_\_\_.

### CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1, ASME A112.19.14
- Certifications: IAPMO (cUPC), State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance



To complete a WaterSense listed combination, the bowl must be paired with a flush valve which is EPA WaterSense listed.

# CT705EN(G)


## Flushometer Toilet, 1.28GPF when used with High Efficiency Flushometer Valve

### SPECIFICATIONS

- Water Use 1.28GPF/4.8LPF (or 1.6GPF/6.0LPF when used with 1.6GPF flush valve)
- Flush System Siphon jet flushing action
- Min. Water Pressure 35 psi (flowing)
- Min. Flow Rate 23 GPM
- Water Surface 10-1/4" x 9-5/8"
- Trap Diameter 1-7/8"
- Rough-in 12", or 10"
- Trap Seal 2-3/8"
- Warranty One Year Limited Warranty
- Material Vitreous china
- Shipping Weight CT705EN(G) - 52.5lbs
- Shipping Dimensions CT705EN(G)  
26-1/2" L x 9-1/2" W<sup>1</sup> x 16-1/4" H<sup>2</sup> x 17" H

### INSTALLATION NOTES

- Spuds are unique for TOTO product. For replacement spuds, contact TOTO for part number THU073R

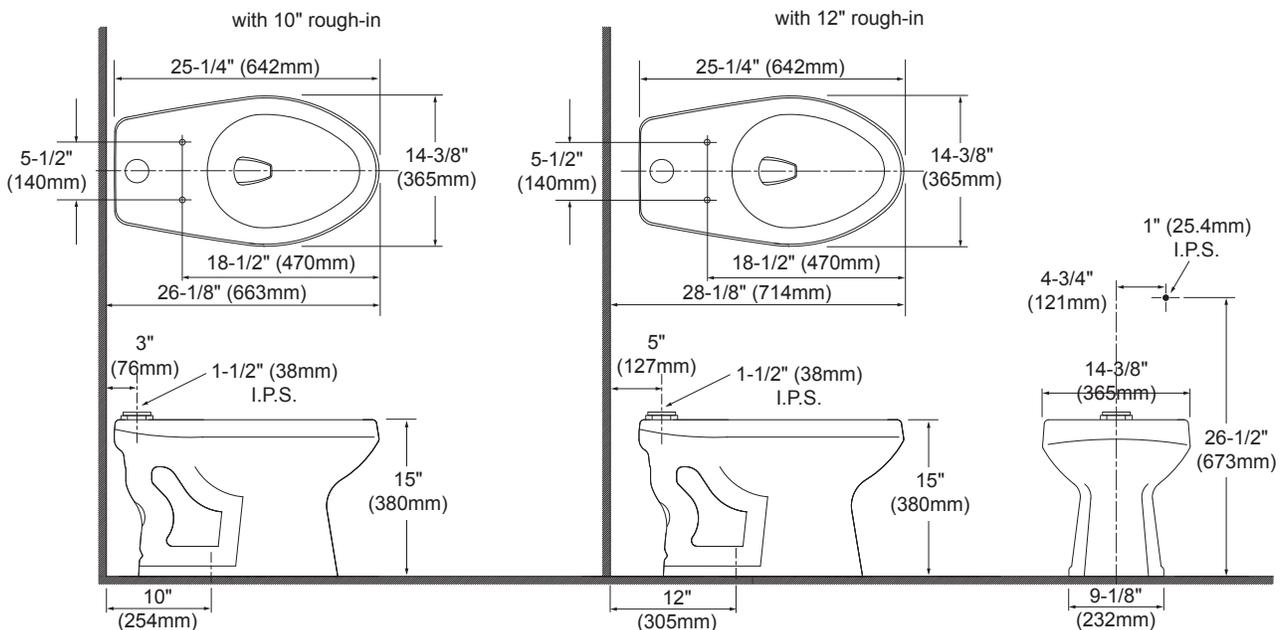

**TOTO**

*These dimensions and specifications are subject to change without notice*