



FBF794S#01D

Cast Iron Nexus Bathtub

FEATURES

- 66-15/16" x 29-1/2" x 21-1/8"
- Enameled cast iron construction
- Slip-resistant surface
- Acrylic skirt

COLORS/FINISHES

- Standard Shell Color
#01 Cotton
- Standard Drain Finish
CP Polished Chrome
BN Brushed Nickel
- Optional
See price book for additional colors



CODES/STANDARDS

- Meets or exceeds ASME A112.19.1/CSA B45.2
- Certifications: IAPMO(cUPC), State of Massachusetts, City of Los Angeles and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others



PRODUCT SPECIFICATION

The cast-iron bath shall be 66-15/16" in length, 29-1/2" in width and 21-1/8" in height. Bath shall be free standing with center drain. Bath shall have a slip-resistant surface and acrylic skirt. Bath shall be TOTO Model FBF794S_____.

FBF794S#01D

Cast Iron Nexus Bathtub

SPECIFICATIONS


- Size 66-15/16" L x 29-1/2" W x 21-1/8"
- Depth 16-15/16"
- Water Depth 12-7/8" (327mm)
- Warranty Lifetime limited warranty
- Material Enameled cast iron
Acrylic skirt
- Shipping Weight 390 lbs.
- Shipping Dimensions 70-1/2" L x 33-1/16" W x 26-9/16" H
- Gallons 48 to overflow

INSTALLATION NOTES

For installation without access to the floor below a suitable drain connection (not supplied) will be required. Please contact TOTO Tech Support for further assistance. Please check local codes. The feet on FBF794S#01D are adjustable to $\pm 5/16"$ (8 mm). The supplied straight drain bend can be replaced with a tee to allow near horizontal drainage. Brass tee sold separately.

Floor support under bath must provide a minimum of 80 lbs/square foot (391 kg/square meter) loading.

Check local codes for requirements on installing an ASSE 1070/ASME A112. 1070/CSA B125.70 compliant device in series with the tub faucet.

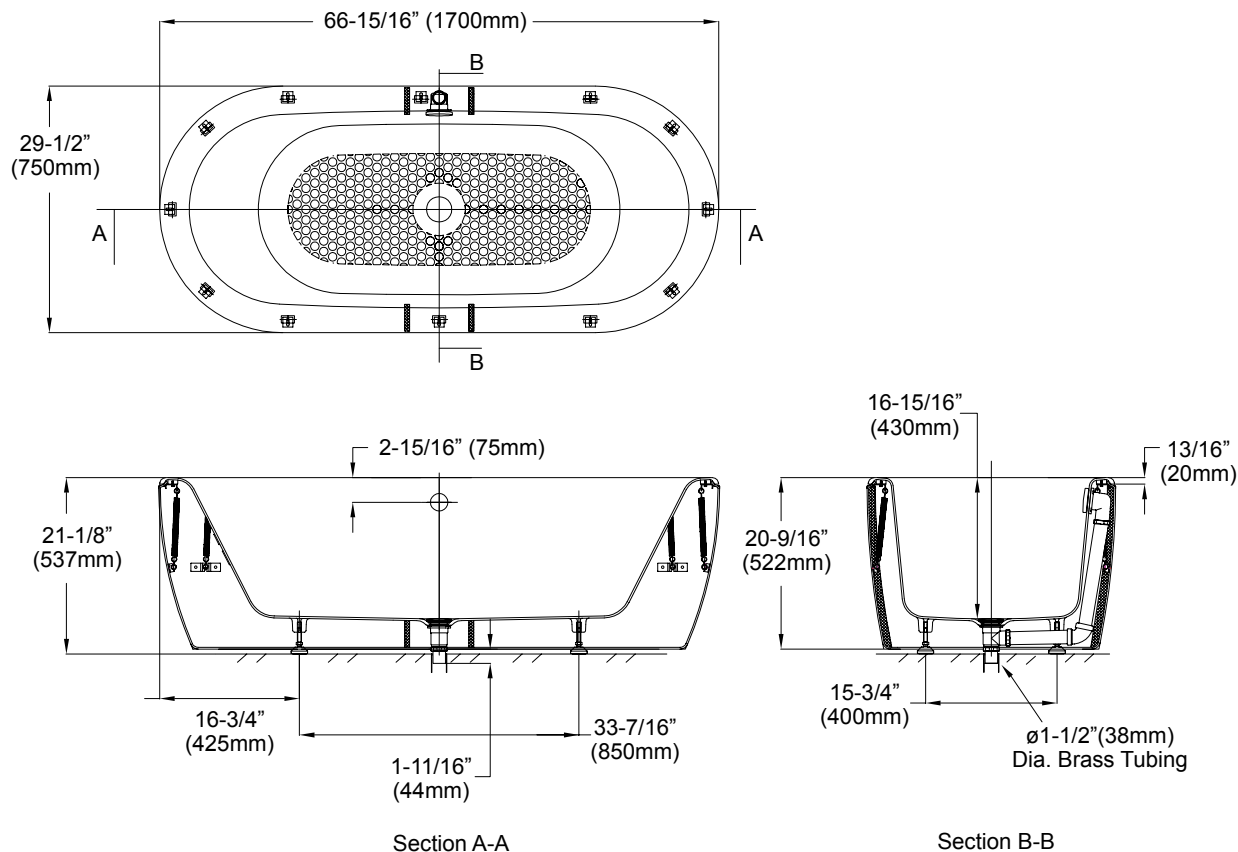

TOTO®

These dimensions and specifications are subject to change without notice