Luminist™ Round Vessel Lavatory

FEATURES

- Epoxy resin luminist vessel lavatory
- Luminist is an semi-clear epoxy resin that displays exceptional strength and is highly scratch and impact resistant
- LED lighting system
- Without overflow
- Complete with installation template, hardware and chrome drain fitting

COLORS/FINISHES

• #63 Angelic White

MODELS

- LLT152#63-BL Black Drain Cover
- LLT152#63-WH White Drain Cover

CODES/STANDARDS

- Meets and exceeds CSA B45 series, ANSI Z124.3, UL 1951, CSA 22.2 #14
- Certifications: IAPMO(cUPC), State of Massachusetts, and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others
- ADA compliant
- Complies with CA Prop 65 warning requirements







Recommended faucets:

Helix Ecopower wall mount TEL3GW10#CP TEL3GW60#CP TEL5GW10#CP TEL5GW60#CP

Aquia Basic (Tall) TL416SDH#CP

En Single Lever TL382SDL

PRODUCT SPECIFICATION

The epoxy resin luminist round vessel lavatory shall be without overflow. Vessel lavatory shall include complete installation template, hardware and chrome drain fitting. Vessel lavatory shall be TOTO Model LLT152#63____.

Luminist™ Round Vessel Lavatory

SPECIFICATIONS

Waste 1-1/4" O.D.
Size 15-5/8"D
Basin 14"D
Basin Depth 3-1/2"

Warranty
 One Year Limited Warranty

Material Epoxy Resin

Power Adapter Input: 100-240V, 47/63Hz,

0.5A Max

Output: 12V, 1.6A Max 4 Foot Cord Length

UL Listed

Shipping Weight 19.0 lbs.

Shipping Dimensions 22-1/4" W x 17-7/8" H


x 7-5/8" L

INSTALLATION NOTES

Follow both the installation and user instructions before installing. It is recommended to use an outlet that is on a wall switch for easy on/off. Otherwise the user must have access to the switch located directly on the power adapter. Connect the power plug into appropriate grounded, 120 V/ 60 Hz, GFCI outlet. Failure to follow warnings and instructions can result in serious injury, electric shock, product malfunction, and property damage.

CAUTION & WARNINGS

- This product is for indoor use only. Do not install outdoors
- Keep the lavatory out of direct sunlight to reduce discoloration

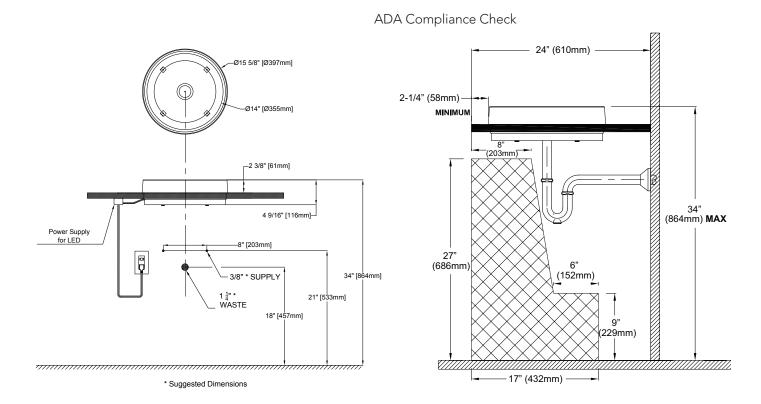

These dimensions and specifications are subject to change without notice