

Aimes® Ceiling-Mount Showerhead with LED Lighting

FEATURES

- Hydropower self-generating system
- No external power required
- LED lighting system
- Maximum flow rate of 2.5 gpm (9.5 lpm)
- 11" spray face
- Single spray showerhead
- Rubber nozzles to prevent limescale build up
- Ceiling-mount installation

COLORS/FINISHES

- #CP Polished Chrome



CODES/STANDARDS

- Meets or exceeds ASME A112.18.1/CSA B125.1
- Certifications: IAPMO(cUPC), State of Massachusetts and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others
- Complies with CA Prop 65 warning requirements



PRODUCT SPECIFICATION





The ceiling-mount showerhead shall have a hydro-power self-generating system. Product shall have no external power required. Product shall have a LED lighting system. Product shall have a single spray face. Product shall have rubber nozzles to prevent limescale build up. Product shall have a flow rate of 2.5 gallons per minute. Showerhead shall be TOTO Model TS626KG#_____.

TS626KG

Aimes® Ceiling-Mount Showerhead with LED Lighting

SPECIFICATIONS

- Warranty: Lifetime Limited Warranty (Residential Use)
One Year (Commercial Use)
- Material: Bronze and Epoxy Resin
- Shipping Weight: 28.2 lbs.
- Shipping Dimensions: 17-1/2" L x 17-3/4" W x 14" H
- Maximum Flow Rate: 2.5 gpm (9.5 lpm)

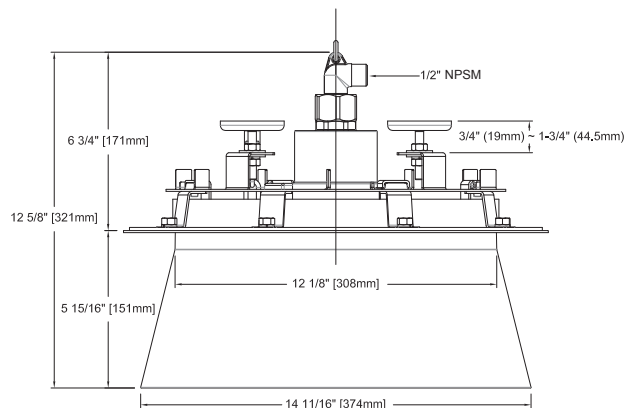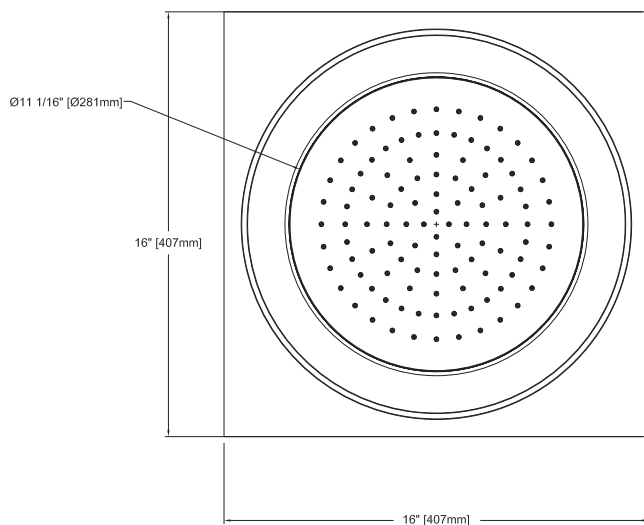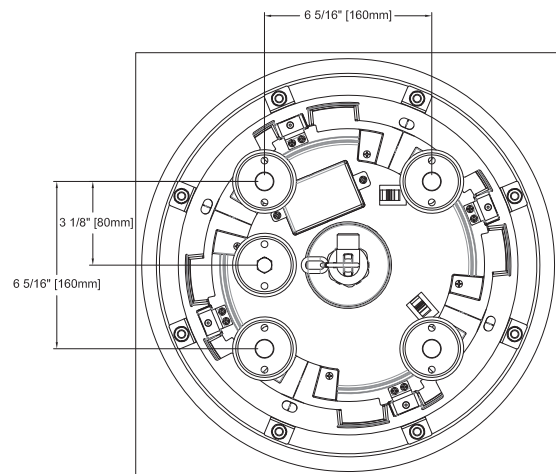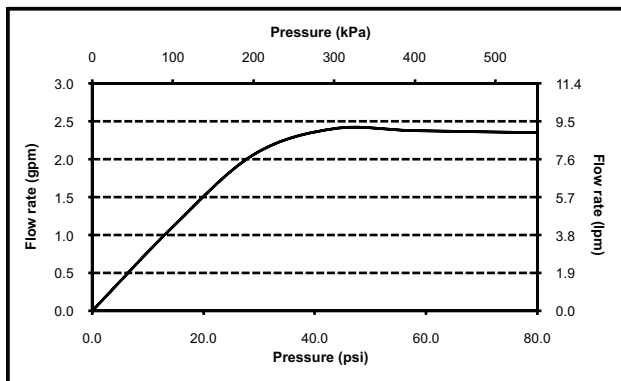

TOTO®

These dimensions and specifications are subject to change without notice