

TOTO®

MS814224CUF(R)(G)

Promenade® II One-Piece Toilet, 1.0GPF

FEATURES

- TORNADO FLUSH® system, high-efficiency (1.0GPF/3.8LPF)
- CEFIONTECT® glaze prevents debris from sticking to ceramic surfaces, making them easier to clean
- ADA Compliant
- Universal Height
- One-piece decorative high-profile toilet
- Includes SoftClose® seat SS224
- Chrome trip lever
- 12" Rough-in
- Clear glazed trapway coating

MODELS

- **MS814224CUFG (#01, #03, #11, #12)**
With CEFIONTECT ceramic glaze
Includes SS224 SoftClose seat
- **MS814224CUF (#51)**
Without CEFIONTECT
Includes SS224 SoftClose seat
- **MS814224CUFRG (#01)**
With right-hand trip lever, CEFIONTECT ceramic glaze and SS224 SoftClose seat

OPTIONAL COMPONENT

- **THU458(#01, #BN, #PN, #MBL)**
Left Hand Trip Lever - Cotton, Brushed Nickel, Polished Nickel, Matte Black

COLORS/FINISHES

- Standard
 - #01 Cotton
 - #03 Bone
 - #11 Colonial White
 - #12 Sedona Beige
 - #51 Ebony (without CEFIONTECT)

PRODUCT SPECIFICATION

The two-piece high-efficiency Tornado Flush system toilet shall be 1.0GPF/3.8LPF. Toilet shall have high-profile tank, elongated front bowl and chrome trip lever. Toilet shall be universal height and ADA compliant when approached from trip lever side. MS814224CUFG model shall have CeFiONtect ceramic glaze. Toilet shall be TOTO Model MS814224CUF_____.



1G One Gallon Per Flush

CE CEFIONTECT

TF Tornado Flush

U Universal Height

CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC), EPA Watersense, State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance, Buy American Act (BAA)
- ADA compliant (when installed with trip lever located on the approach side)
- Complies with CA Prop 65 warning requirements



CALGreen

MS814224CUF(R)(G)

Promenade® II One-Piece Toilet, 1.0GPF


SPECIFICATIONS

Water Use	1.0 GPF/3.8LPF
Flush System	Tornado Flush
Min. Water Pressure	8 psi (static)
Water Surface	9" x 6-3/4"
Trap Diameter	2-1/8"
Rough-in	12"
Trap Seal	2-1/4"
Warranty	One Year Limited Warranty
Material	Vitreous china
Shipping Weight	103 lbs
Shipping Dimensions	32" L x 20" W x 17-3/4" H ¹ x 28-3/4" H ²

INSTALLATION NOTES


Back-to-Back Toilet Installations:

TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

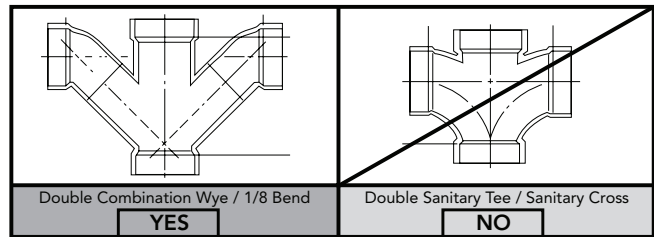

Ultra-low high efficiency toilets require a system with adequate supplemental flows from other water usage fixtures and a 4" ID drainline with minimum 2% slope and maximum linear runs of 60ft.

DIMENSIONS

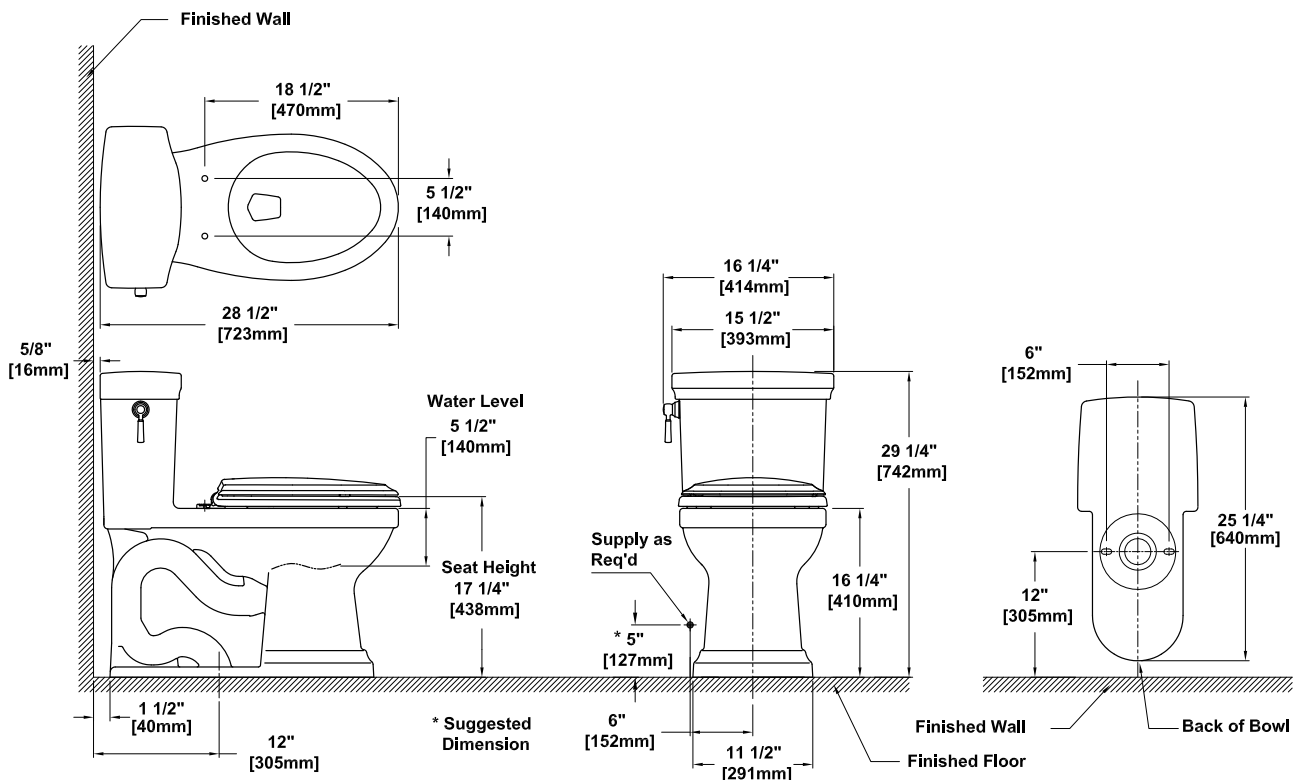

TOTO

These dimensions and specifications are subject to change without notice