MS634124CEF(G)

Supreme® II One-Piece Toilet, 1.28 GPF

FEATURES

- TORNADO FLUSH_® system, high-efficiency (1.28 GPF/4.8 LPF)
- CEFIONTECT® ceramic glaze prevents debris and mold from sticking to ceramic surfaces
- Specially designed to accommodate a WASHLET®+
- UNIVERSAL HEIGHT
- Elongated front bowl and seat
- 12" Rough-in
- Chrome plated trip lever

MODELS & COMPONENTS

- MS634124CEFG (#01, #03, #11, #12)
 With CEFIONTECT® ceramic glaze & includes SS124
 SoftClose seat
- MS634124CEF (#51)
 Same as MS634124CEFG without CEFIONTECT ceramic glaze

Optional Components

• THU808(#01, #03, #11, #12, #51, #BN, #PN, #PB, #RB, #MBL)-A

Trip Lever - Cotton, Bone, Colonial White, Sedona Beige, Ebony, Brushed Nickel, Polished Nickel, Polished Brass, Oil Rubbed Bronze, Matte Black

COLORS/FINISHES

- #01 Cotton
- #12 Sedona Beige

Made to Order

- #03 Bone
- #11 Colonial White
- #51 Ebony

PRODUCT SPECIFICATION

The one-piece high-efficiency TORNADO FLUSH system toilet shall be 1.28 GPF/4.8 LPF. Toilet shall have optional CEFIONTECT ceramic glaze and be at Universal Height. Toilet shall have elongated front bowl with SoftClose seat and Polished Chrome trip lever. Toilet shall be TOTO Model MS634124CEF____.







CODES/STANDARDS

- Meets or exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC), EPA Watersense, State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance
- ADA compliant (when installed with trip lever located on the approach side)
- Complies with CA Prop 65 warning requirements







Supreme® II One-Piece Toilet, 1.28 GPF


SPECIFICATIONS

Water Use	1.28 GPF (4.8 LPF)
Flush System	TORNADO FLUSH®
Min. Water Pressure	8 psi (Static)
Water Surface	6-7/8" x 9-3/4"
Trap Diameter	2-1/8"
Rough-in	12"
Trap Seal	2-1/8"
Warranty	One Year Limited Warranty
Material	Vitreous China
Shipping Weight	104 lbs
Shipping Dimensions	32"L x 20"W x 17-3/4"H1 x 28-3/4"H2

INSTALLATION NOTES


Back-to-Back Toilet Installations:

TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.



To maintain adequate wall gap between the back of the tank and wall, mount the floor flange at a nominal 12" rough-in distance.

DIMENSIONS

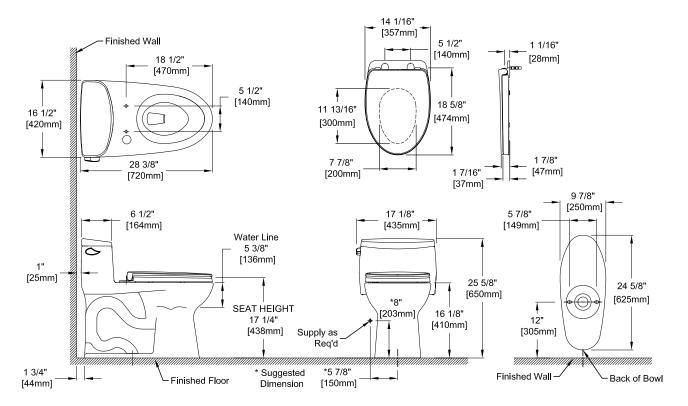



These dimensions and specifications are subject to change without notice