TOTO_®

MW6344726CEFG

Supreme® II WASHLET®+ S7 One-Piece Toilet - 1.28 GPF

FEATURES

- Concealed supply connection for seamless installation
- High-efficiency TORNADO FLUSH® system 1.28 GPF (4.8 LPF)
- CEFIONTECT® ceramic glaze minimizes waste from sticking to porous ceramic surfaces
- Decorative one-piece design
- Universal Height
- Chrome plated trip lever
- 12" Rough-in
- Elongated front bowl and WASHLET+ S7 and tank set
- EWATER+® auto-cleans wand and bowl after every use
- PREMIST® automatically mists the bowl before each use
- Multifunction pearl white block-style remote control
- Night light

MODELS

MW6344726CEFG (#01)

With CEFIONTECT ceramic glaze, WASHLET+ S7 with contemporary design

- CST634CEFGT40
 Elongated bowl with CEFIONTECT
- SW4726AT40
 WASHLET+ S7

OPTIONAL COMPONENTS

THU808(#01, #03, #11, #12, #51, #BN, #PN, #RB)-A
 Trip Lever (Cotton, Bone, Colonial White, Sedona
 Beige, Ebony, Brushed Nickel, Polished Nickel, Oil
 Rubbed Bronze)

COLORS/FINISHES

#01 Cotton











PRODUCT SPECIFICATION

The one-piece high-efficiency TORNADO FLUSH system toilet shall be 1.28 GPF (4.8 LPF). Toilet shall have optional CEFIONTECT ceramic glaze and be at Universal Height. Toilet shall have elongated front bowl with SoftClose seat and Polished Chrome trip lever. Toilet shall be TOTO Model MW6344726CEFG___#01.

See SW4726AT40 Specification Sheet for details on included WASHLET.

CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO (cUPC®), EPA WaterSense®, State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance, and others
- ADA compliant for residential use when installed with trip lever located on the approach side
- Complies with CA Prop 65 warning requirements







SPECIFICATIONS


| Water Use | 1.28 GPF (4.8 LPF) |
|------------------------|--|
| Flush System | TORNADO FLUSH® |
| Min. Water Pressure | 8 psi (Flowing) |
| Water Surface | 6-5/8" x 9-1/8" |
| Trap Diameter | 2-1/8" |
| Rough-in | 12" |
| Trap Seal | 2-1/8" |
| Warranty | One Year Limited Warranty |
| Material | Vitreous China |
| Shipping Weight | CST634CEFGT40: 99 lbs SW4726AT40: 14.5 lbs |
| Shipping Dimensions | CST634CEFGT40 30" L x 19" W x 29-5/8" H ¹ x 18-1/2" H ² SW4726AT40 23-3/8" L x 17-5/8" W x 6-1/4" H |

See SW4726AT40 Specification Sheet for details on included WASHLET.

INSTALLATION NOTES


Back-to-Back Toilet Installations:

TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.



To maintain adequate wall gap between the back of the tank and wall, mount the floor flange at a nominal 12" rough-in distance.

DIMENSIONS

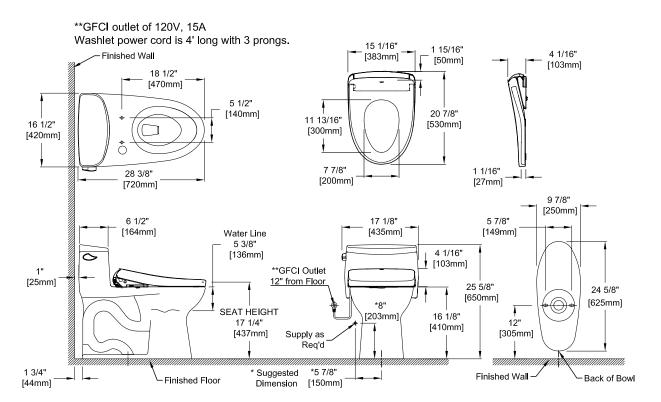



These dimensions and specifications are subject to change without notice