TOTO®

MW4464726CEMGN(A)

Aquia_® IV WASHLET_®+ S7 Two-Piece Toilet - 1.28 GPF / 0.9 GPF

FEATURES

- Concealed supply connection for seamless installation
- DYNAMAX TORNADO FLUSH_® utilizes 360° cleaning power to reach every part of the bowl
- Ultra high-efficiency dual flush 1.28 GPF / 0.9 GPF (4.8 LPF / 3.4 LPF)
- CEFIONTECT® ceramic glaze minimizes waste from sticking to porous ceramic surfaces
- Completely skirted design for a sleek and understated look that's easier to clean
- Chrome plated push-button
- 12" Rough-in
- Elongated front bowl and WASHLET+ S7 and tank set
- $\bullet \quad \text{EWATER} +_{\$} \text{auto-cleans}$ wand and bowl after every use
- PREMIST® automatically mists the bowl before each use
- Multifunction pearl white block-style remote control
- Night light
- Auto flush available as upgrade

MODELS

MW4464726CEMGNA (#01)

With CEFIONTECT ceramic glaze, WASHLET+ S7 with contemporary design and Auto Flush

- CT446CEGNT40
 Elongated bowl with CEFIONTECT
- **ST446EMNA**Tank and cover only
- **SW4726AT40** WASHLET+ S7
- THU855
- Auto Flush Kit
- **9AU321-A**WASHLET Adaptor
- MW4464726CEMGN (#01)

Same as MW4464726CEMGNA without Auto Flush

OPTIONAL COMPONENTS

- TSU48.10
 - 10" Unifit Rough-In
- TSU48.14
 - 14" Unifit Rough-In
- THU842(#01, #BN, #PN)-A

Push Button Assembly (Cotton, Brushed Nickel, Polished Nickel)

COLORS/FINISHES

#01 Cotton











PRODUCT SPECIFICATION

The two-piece, ultra high-efficiency, DYNAMAX TORNADO FLUSH toilet shall be dual flush 1.28 GPF / 0.9 GPF (4.8 LPF / 3.4 LPF). Toilet shall be coated with CEFIONTECT, elongated front bowl, high profile tank, UNIVERSAL HEIGHT, complete skirted bowl and chrome push-button. Toilet shall be TOTO Model MW4464726CEMGN_#01.

See SW4726AT40 Specification Sheet for details on included WASHLET.

CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1, ASME A112.19.14
- Certifications: IAPMO (cUPC_®), EPA WaterSense_®, State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance, and others
- Complies with CA Prop 65 warning requirements



Aquia_® IV WASHLET_®+ S7 Two-Piece Toilet - 1.28 GPF / 0.9 GPF

SPECIFICATIONS


Water Use	1.28 GPF / 0.9 GPF (4.8 LPF / 3.4 LPF)
Flush System	DYNAMAX TORNADO FLUSH®
Min. Water Pressure	8 psi (Flowing)
Water Surface	7" × 5"
Trap Diameter	2-1/4"
Rough-in	12" (10" and 14" options available)
Trap Seal	2-1/8"
Warranty	One Year Limited Warranty
Material	Vitreous China
Shipping Weight	CT446CEGNT40: 81 lbs ST446EMNA: 29 lbs SW4726AT40: 14.5 lbs
Shipping Dimensions	CT446CEFGNT40 29-5/8" L x 16-3/8" W x 18-5/8" H ST446EMNA 17-1/4" L x 7-7/8" W x 17-1/2" H SW4726AT40 23-3/8" L x 17-5/8" W x 6-1/4" H

See SW4726AT40 Specification Sheet for details on included WASHLET.

INSTALLATION NOTES


Back-to-Back Toilet Installations:

TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.



To maintain adequate wall gap between the back of the tank and wall, mount the floor flange at a nominal 12" rough-in distance.

DIMENSIONS

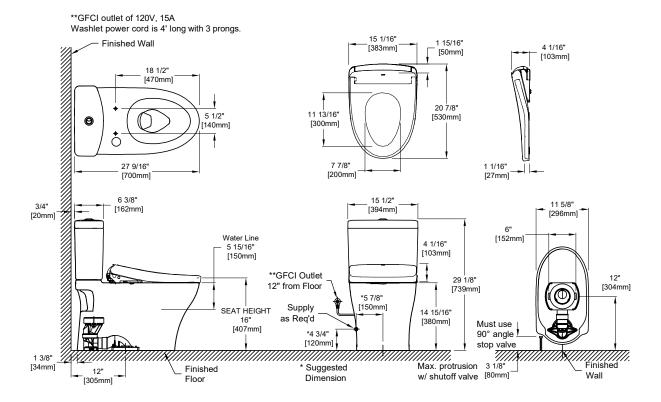



These dimensions and specifications are subject to change without notice