TOTO_®

MW4744726CUFG(A)

Vespin® II 1G® WASHLET®+ S7 Two-Piece Toilet - 1.0 GPF

FEATURES

- Concealed supply connection for seamless installation
- Ultra high-efficiency TORNADO FLUSH® system -1.0 GPF (3.8 LPF)
- CEFIONTECT® ceramic glaze minimizes waste from sticking to porous ceramic surfaces
- Skirted Design
- Universal Height
- Chrome plated trip lever
- 12" Rough-in
- Elongated front bowl and WASHLET+ S7 and tank set
- EWATER+® auto-cleans wand and bowl after every use
- PREMIST® automatically mists the bowl before each use
- Multifunction pearl white block-style remote control
- Night light
- Auto flush available as upgrade

MODELS

MW4744726CUFGA (#01)

With CEFIONTECT ceramic glaze, WASHLET+ S7 with contemporary design and Auto Flush

- CT474CUFGT40
 - Elongated bowl with CEFIONTECT
- ST453UA
 - Tank and cover only
- SW4726AT40
 - WASHLET+ S7
- THU856
 - Auto Flush Kit
- MW4744726CUFG (#01)

Same as MW4744726CUFGA without Auto Flush

OPTIONAL COMPONENTS

- TSU01W.10R
 - 10" Rough-In
- TSU01W.14R
 - 14" Rough-In
- THU485(#01, #BN, # PN)

Trip Lever (Cotton, Brushed Nickel, Polished Nickel)

COLORS/FINISHES

• #01 Cotton



- One Gallon Per Flush
- **U** UNIVERSAL HEIGHT
- TORNADO FLUSH
- **EWATER+**
- **CEFIONTECT**
- Auto Flush

PRODUCT SPECIFICATION

The two-piece high-efficiency TORNADO FLUSH toilet shall be 1.0 GPF (3.8 LPF). Universal Height Toilet with CEFIONTECT glaze finish. Toilet shall have high-profile tank, elongated front bowl and chrome trip lever. Toilet shall be TOTO Model MW4744726CUFG___#01.

See SW4726AT40 Specification Sheet for details on included WASHLET.

CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO (cUPC_®), EPA WaterSense_®, State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance, and others
- ADA compliant for residential use with autoflush feature model, or with trip lever located on the approach side
- Complies with CA Prop 65 warning requirements







SPECIFICATIONS


Water Use	1.0 GPF (3.8 LPF)
Flush System	TORNADO FLUSH®
Min. Water Pressure	8 psi (Flowing)
Water Surface	6-3/4" x 8-5/8"
Trap Diameter	2-1/8"
Rough-in	12" (10" and 14" options available)
Trap Seal	2-1/8"
Warranty	One Year Limited Warranty
Material	Vitreous China
Shipping Weight	CT474CUFGT40: 75 lbs ST453UA: 28 lbs SW4726AT40: 14.5 lbs
Shipping Dimensions	CT474CUFGT40 30-1/8"L x 16-3/4"W x 22"H ST453UA 18" L X 9" W x 16" H SW4726AT40 23-3/8" L x 17-5/8" W x 6-1/4" H

See SW4726AT40 Specification Sheet for details on included WASHLET.

INSTALLATION NOTES

Back-to-Back Toilet Installations:


TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.



To maintain adequate wall gap between the back of the tank and wall, mount the floor flange at a nominal 12" rough-in distance.

Ultra-low high efficiency toilets require a system with adequate supplemental flows from other water usage fixtures and a 4" ID drainline with minimum 2% slope and maximum linear runs of 60ft.

DIMENSIONS

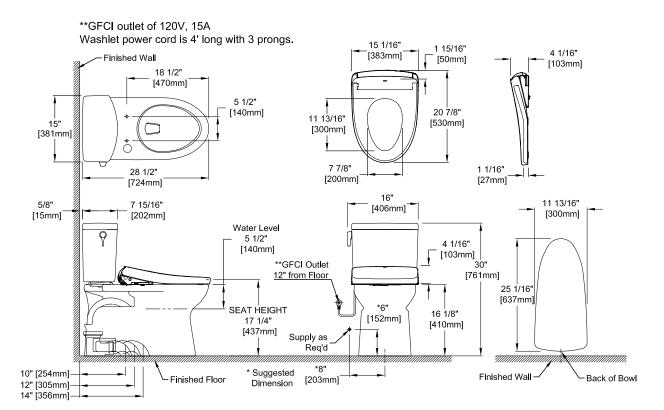



These dimensions and specifications are subject to change without notice