

IoT-Enabled Touchless Soap Dispenser - Square Vessel with Subtank

FEATURES

- Wireless Communication
- Connects seamlessly with Smart Monitoring System and through an API to facilities monitoring platforms
- Service agreement is required to enable IoT or Smart Features
- Touchless soap dispenser's operation is independent of its IoT capability
- Some of the IoT-enabled Smart Features include: failure detection, usage and soap consumption.
- Sensor operated foaming soap dispenser
- Self-adjusting sensor spout with base unit, mounting hardware and supply lines
- Chrome plated
- Single-hole mount
- TOTO Soap required
- Refillable tank system



COLORS/FINISHES

- #CP Polished Chrome

MODELS

- TES204AGi2#CP (2 Spouts)**
TLK08003G#CP (Spout x 2 pcs)
TLK01106UiA (Controller & Reservoir)
TLK01401U (5.3 gal/20L Subtank)
THP3395 (IoT Communication Card)
- TES205AGi2#CP (3 Spouts)**
TLK08003G#CP (Spout x 3 pcs)
TLK01107UiA (Controller & Reservoir)
TLK01401U (5.3 gal/20L Subtank)
THP3395 (IoT Communication Card)
- TES204AGi4#CP (2 Spouts)**
TLK08003G#CP (Spout x 2 pcs)
TLK01106UiA (Controller & Reservoir)
TLK01401U (5.3 gal/20L Subtank)
THP3566 (IoT Communication Card)
- TES205AGi4#CP (3 Spouts)**
TLK08003G#CP (Spout x 3 pcs)
TLK01107UiA (Controller & Reservoir)
TLK01401U (5.3 gal/20L Subtank)
THP3566 (IoT Communication Card)

Auto Functions

PRODUCT SPECIFICATION

TOTO Model # _____ Product shall be automatic infrared sensor activated. Product shall have automatic sensor adjustment upon installation. Soap dispenser, controller w/ resevoir, and subtank will be sold separately. Product hall have a controller pump with 0.8 gallon (3L) resevoir. Product shall have a 5.3 gallon (20L) subtank.

OPTIONAL ACCESSORIES

- THP3374
Mounting bracket for tank

CODES/STANDARDS

- Meets and exceeds UL1951, CSA C22.2 #68
- Certifications: UL
- Code Compliance: NEC, CEC
- ADA Compliant
- Compliance with CA Prop 65 warning requirements
- FCC compliant to Part 15



COMPONENT BREAKDOWN

Soap Dispenser Specification Details

Step 1: Choose quantity of spouts desired

Step 2: Select kit or by individual component quantities

KIT OPTIONS	COMPONENTS								
	Kit Model#	Spout Model#	QTY	Controller & Reservoir Model#	QTY	Subtank Model#	QTY	IoT Card Model#	QTY
TES204AGi2#CP	---	TLK08003G#CP	2	TLK01106UiA	1	TLK01401U	1	THP3395	1
TES205AGi2#CP	---	TLK08003G#CP	3	TLK01107UiA	1	TLK01401U	1	THP3395	1
TES204AGi4#CP	---	TLK08003G#CP	2	TLK01106UiA	1	TLK01401U	1	THP3566	1
TES205AGi4#CP	---	TLK08003G#CP	3	TLK01107UiA	1	TLK01401U	1	THP3566	1

TES20(4/5)AGi Series


IoT-Enabled Touchless Soap Dispenser - Square Vessel with Subtank

SPECIFICATIONS

Power Supply	AC 120V
Wattage	(TLK01106UiA) 6.5W (TLK01107UiA) 9W
Sensor Detection Range	5-1/8" ~ 7-7/8" (130 ~ 200 mm) Sensor is self-adjusting
Ambient Temperature	34-104°F (1-40°C)
Humidity	Max. 90% RH
Power Cord Length	55" (1.4 m)
Soap Output Volume	0.04 oz (factory setting)
Tank Capacity	Approximately 0.8 gal (3L) Tank Approximately 5.3 gal (20L) Subtank
Warranty	*Three Year Warranty

* Failure to use TOTO soap will void warranty

DIMENSIONS

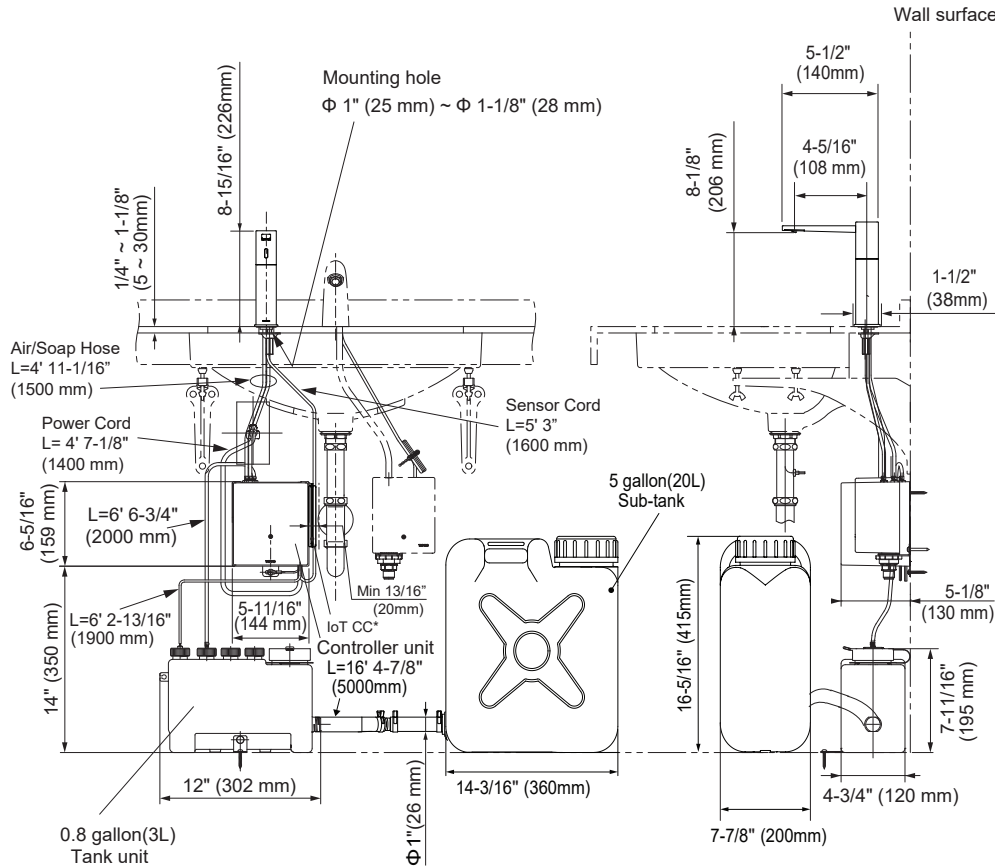

* Communication Card

INSTALLATION NOTES

- Spout Mounting Hole $\varnothing 1" \sim \varnothing 1\text{-}1/8"$ ($\varnothing 25 \sim \varnothing 28$ mm)
- Deck Thickness 1/4" ~ 1-1/8" (5 ~ 30 mm)
- A minimum of 13/16" (20mm) clearance on the right side of the controller is required for IoT communication card installation. Please refer to the diagram below.

TOTO SOAP *(Sold Separately)*

SKU No.	Quantity	Packaging	Notes
TSFG1	4 gal.	Package of 4, 1 gal. each	Antimicrobial Soap (Fresh)
TSFB1-GS	4 gal.	Package of 4, 1 gal. each	TOTO Foam Soap Green Seal™ (Lilac)



TOTO®

These dimensions and specifications are subject to change without notice