

FEATURES

- Sensor operated liquid soap dispenser
- Sleek and compact modern design
- Solid brass spout and body
- Removable soap tank for easy access and effortless soap refill
- Vandal resistant spout
- Two power options: AC or DC
- Chrome Plated
- Single-hole mount
- TOTO Soap required
- ADA compliant

OPTIONAL ACCESSORIES

- **THP3140#CP**
Escutcheon Plate

MODELS

- **TES100AAR#CP** - AC Type
- **TES100DAR#CP** - DC Type

COLORS/FINISHES

- #CP Polished Chrome

TOTO SOAP *(Sold Separately)*

SKU NO.	QTY	Packaging	Notes
TSFG1	4 gal.	4, 1 gal. ea.	Antibacterial Foam Soap
TSF201	4 gal.	4, 1 gal. ea.	TOTO Foam Hand Soap Green Seal® GS-41
TSF205	5 gal.	1, 5 gal.	TOTO Foam Hand Soap Green Seal® GS-41



AUTO FUNCTIONS

PRODUCT SPECIFICATION

TOTO Model # _____ soap dispenser shall have automatic infrared sensor. Product shall have a 0.4 gallon (1500 ml) soap tank.

CODES/STANDARDS

- Certifications: AC model supplied with UL listed Class 2 power supply
- Code Compliance: NEC, CEC
- ADA Compliant
- Complies with CA Prop 65 warning requirements



TES100AAR & TES100DAR

Touchless Soap Dispenser


SPECIFICATIONS

	TES100DAR#CP	TES100AAR#CP
Power Supply	DC 4 D1.5V alkaline batteries	AC Input 100-240 Output 6V DC, 1.50A double insulated
AC Power Cord	59" (1500mm)	
Soap Tube	17-3/4" (450mm)	
Sensor Cable	19-3/4" (500mm)	
Dispense Volume	0.03 ± 0.01 oz (1.0 ± 0.2 ml)	
Sensor Detection Range	5-7/8" ± 9/16" (150mm ± 15mm)	
Ambient Temperature	34-104°F (1-40°C)	
Max humidity	90% RH	
Tank capacity	Approximately 0.4 gallon (1500 ml)	
Warranty	*Three Years	
Discharge soap type	Liquid	


* Failure to use TOTO soap will void warranty

INSTALLATION NOTES


- Product base (no escutcheon) will cover a drill hole diameter of: **1" ~ 1-1/4" (25 ~ 32mm)**
- Product base with optional escutcheon plate (THP3140#CP) will cover a drill hole diameter of: **1-1/4" ~ 1-1/2" (32 ~ 38mm)**

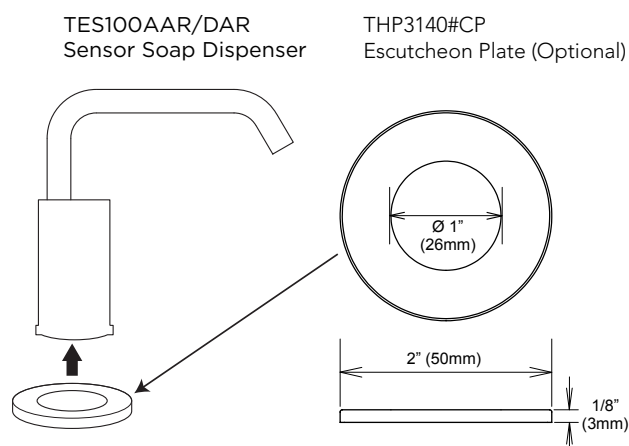

FRONT VIEW

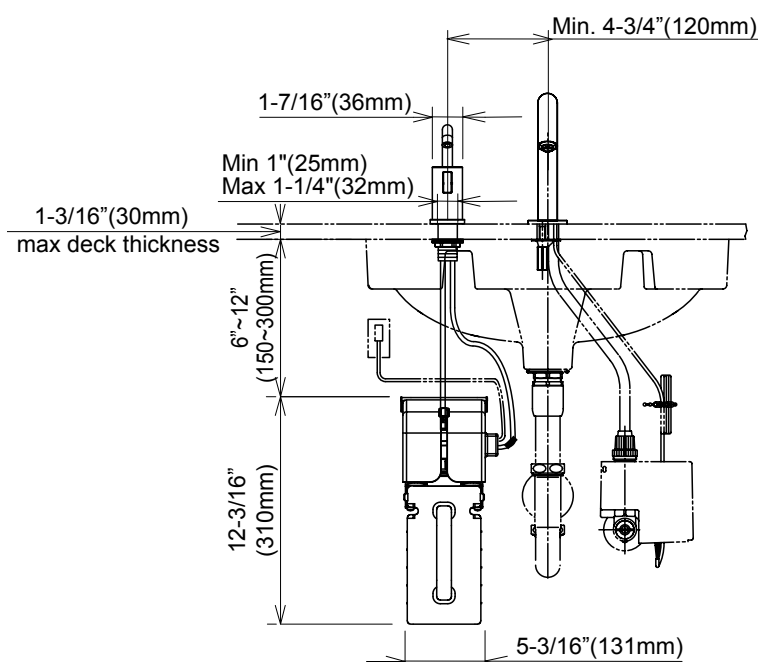

SIDE VIEW

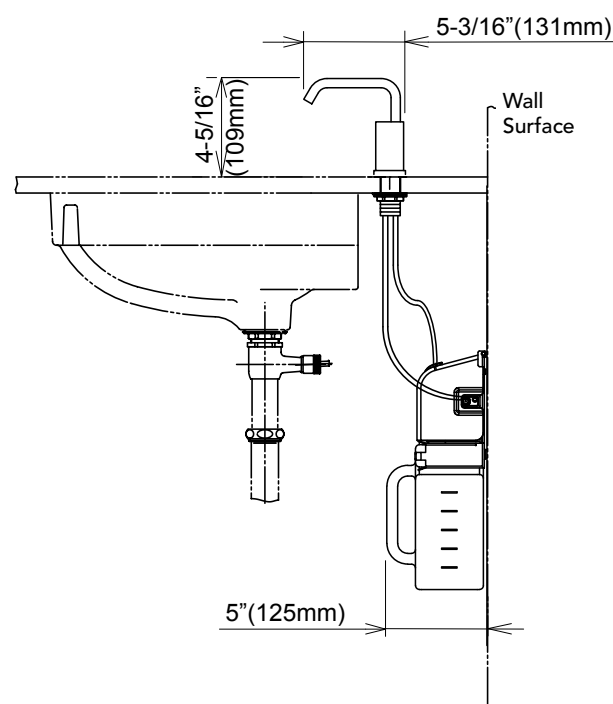

TOTO

These dimensions and specifications are subject to change without notice