

Redington™ One-Piece Toilet - 1.28 GPF

FEATURES

- High-efficiency TORNADO FLUSH® system - 1.28 GPF (4.8 LPF)
- CEFIONTECT® ceramic glaze prevents debris and mold from sticking to ceramic surfaces
- Specially designed to accommodate WASHLET®+
- Completely skirted design for a sleek and understated look that's easier to clean
- UNIVERSAL HEIGHT
- Elongated front bowl with SoftClose® seat
- 12" Rough-in
- Chrome plated trip lever

MODELS

- **MS672234CEFG (#01)**
With CEFIONTECT ceramic glaze, SS234 Slim Elongated SoftClose seat

COMPONENTS

- **CST672CEFGAT40**
Elongated bowl with CEFIONTECT
- **SS234**
Slim Elongated SoftClose seat

OPTIONAL COMPONENTS

- **TSU10W.10**
10" Unifit Rough-in
- **TSU10W.14**
14" Unifit Rough-in
- **THU886(#01, #BN, #MBL, #PN)-A**
Left Hand Trip Lever (Cotton, Brushed Nickel, Matte Black, Polished Nickel)

COLORS/FINISHES

- #01 Cotton

PRODUCT SPECIFICATION

The one-piece high-efficiency TORNADO FLUSH system toilet shall be 1.28 GPF. Toilet shall be 12" Unifit rough-in. Toilet shall have optional CEFIONTECT ceramic glaze and be at Universal Height. Toilet shall have elongated front bowl with SoftClose seat and Polished Chrome trip lever. Toilet shall be TOTO Model MS672234CEFG#01.



TORNADO FLUSH



CEFIONTECT



UNIVERSAL HEIGHT



SKIRTED DESIGN

CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC®), EPA WaterSense, State of Massachusetts, and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance, and others
- Complies with CA Prop 65 warning requirements



MS672234CEFG

Redington™ One-Piece Toilet - 1.28 GPF


SPECIFICATIONS

Water Use	1.28 GPF (4.8 LPF)
Flush System	TORNADO FLUSH®
Min. Water Pressure	8 psi (Flowing)
Water Surface	9" x 6-1/4"
Trap Diameter	2-1/8"
Rough-in	12" (10" & 14" Optional)
Trap Seal	2-1/8"
Warranty	One Year Limited Warranty
Material	Vitreous China
Shipping Weight	112.5 lbs
Shipping Dimensions	30-1/16" L x 21-9/16" W x 17-9/16" H1 x 27-1/4" H2

INSTALLATION NOTES


Back-to-Back Toilet Installations:

TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

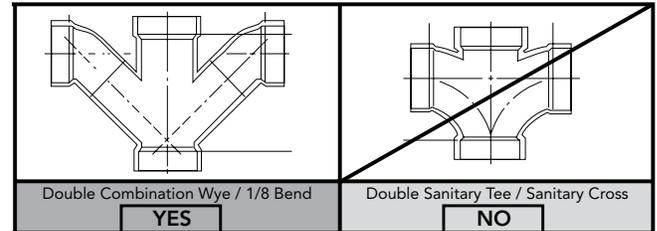

To maintain adequate wall gap between the back of the tank and wall, mount the floor flange at a nominal 12" rough-in distance.

DIMENSIONS

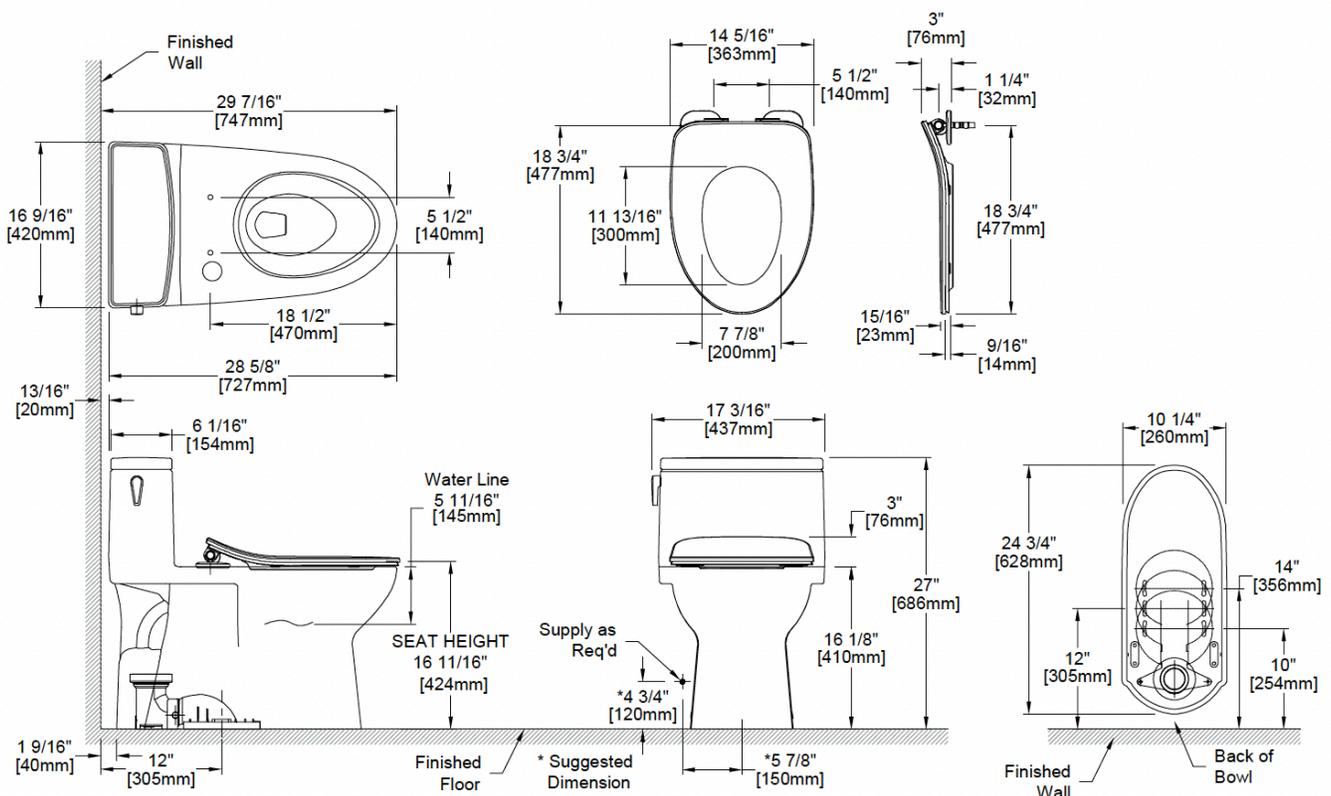

TOTO®

These dimensions and specifications are subject to change without notice