

Redington™ WASHLET®+ S2 One-Piece Toilet - 1.28 GPF

FEATURES

- Concealed supply connection for seamless installation
- High-efficiency TORNADO FLUSH® system - 1.28 GPF (4.8 LPF)
- CEFIONTECT® ceramic glaze prevents debris and mold from sticking to ceramic surfaces
- Completely skirted design for a sleek and understated look that's easier to clean
- Universal Height
- Chrome plated trip lever
- 12" Rough-in
- Elongated front bowl and WASHLET+ S2 set
- EWATER+® auto-cleans wand after every use
- PREMIST® automatically mists the bowl before each use
- Self-cleaning wand cleans itself inside and out before and after every use
- CLEAN RESIN® keeps wand and seat cleaner, more hygienic, and effortless to maintain
- Convenient arm control panel
- Night light illuminates the inside of the bowl



MODELS

- **MW6723346CEFG (#01)**
With CEFIONTECT ceramic glaze, WASHLET+ S2 with contemporary design
 - **CST672CEFGAT40**
Elongated bowl with CEFIONTECT
 - **SW3346**
WASHLET+ S2

OPTIONAL COMPONENTS

- **TSU10W.10**
10" Unifit Rough-in
- **TSU10W.14**
14" Unifit Rough-in
- **THU886(#01, #BN, #MBL, #PN)-A**
Left Hand Trip Lever (Cotton, Brushed Nickel, Matte Black, Polished Nickel)

COLORS/FINISHES

- #01 Cotton

-  **TORNADO FLUSH**
-  **UNIVERSAL HEIGHT**
-  **CEFIONTECT**
-  **EWATER+**
-  **SKIRTED DESIGN**

PRODUCT SPECIFICATION

The one-piece high-efficiency TORNADO FLUSH system toilet shall be 1.28 GPF. Toilet shall be 12" Unifit rough-in. Toilet shall have optional CEFIONTECT ceramic glaze and be at Universal Height. Toilet shall have elongated front bowl with SoftClose seat and Polished Chrome trip lever. Toilet shall be TOTO Model MW6723346CEFG#01.

See **SW3346 Specification Sheet** for details on included WASHLET.

CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC®), EPA WaterSense, State of Massachusetts, and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance, and others
- ADA compliant (when installed with trip lever located on the approach side)
- Complies with CA Prop 65 warning requirements



MW6723346CEFG

Redington™ WASHLET®+ S2 One-Piece Toilet - 1.28 GPF

SPECIFICATIONS


| | |
|----------------------------|--|
| Water Use | 1.28 GPF (4.8 LPF) |
| Flush System | TORNADO FLUSH® |
| Min. Water Pressure | 8 psi (Flowing) |
| Water Surface | 9" x 6-1/4" |
| Trap Diameter | 2-1/8" |
| Rough-in | 12" (10" & 14" Optional) |
| Trap Seal | 2-1/8" |
| Warranty | One Year Limited Warranty |
| Material | Vitreous China |
| Shipping Weight | CST672CEFGAT40: 107.5 lbs SW3346: 16 lbs |
| Shipping Dimensions | CST672CEFGAT40 30-1/16" L x 21-9/16" W x 17-9/16" H1 x 27-1/4" H2 SW3346 24-3/8" L x 21" W x 7-7/16" H |

See SW3346 Specification Sheet for details on included WASHLET.

INSTALLATION NOTES


Back-to-Back Toilet Installations:

TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

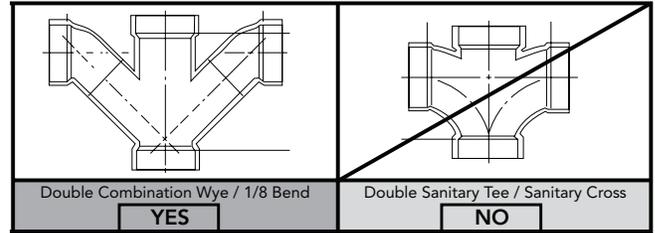

To maintain adequate wall gap between the back of the tank and wall, mount the floor flange at a nominal 12" rough-in distance.

DIMENSIONS

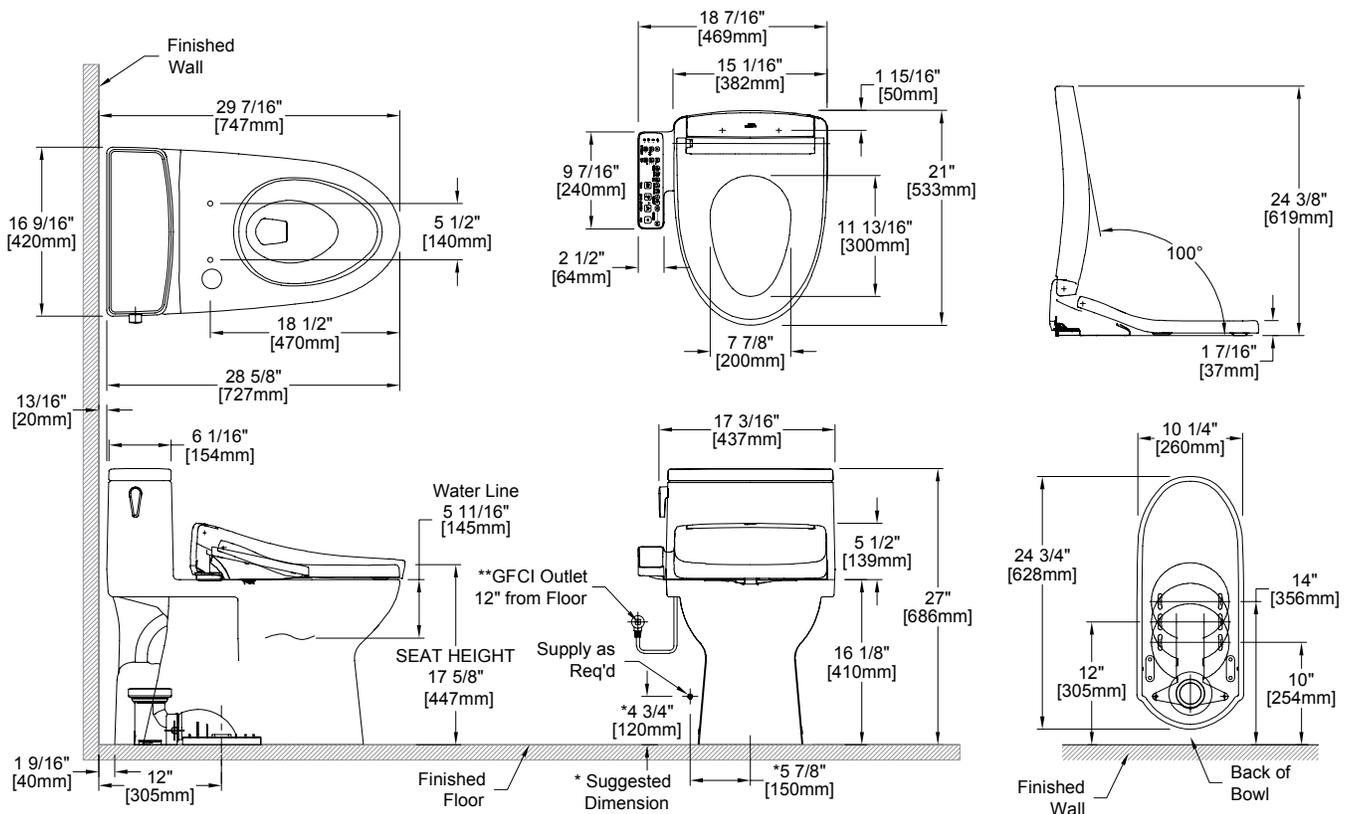

TOTO®

These dimensions and specifications are subject to change without notice