

Glaston™ 1G® Two-Piece Toilet - 1.0 GPF

FEATURES

- Ultra high-efficiency TORNADO FLUSH® system - 1.0 GPF (3.8 LPF)
- CEFIONTECT® ceramic glaze prevents debris and mold from sticking to ceramic surfaces
- Specially designed to accommodate WASHLET®+
- Completely skirted design for a sleek and understated look that's easier to clean
- Universal Height
- Elongated front bowl with SoftClose® seat
- 12" Rough-in
- Chrome plated trip lever

MODELS

- **MS472234CUFG (#01)**
With CEFIONTECT ceramic glaze & includes SS234 SoftClose seat

COMPONENTS

- **CT472CUFGT40**
Elongated bowl with CEFIONTECT
- **ST472UA**
Tank and cover only
- **SS234**
SoftClose seat SS234

OPTIONAL COMPONENTS

- **TSU10W.10**
10" Unifit Rough-in
- **TSU10W.14**
14" Unifit Rough-in
- **THU887(#01, #BN, #MBL, #PN)-A**
Left Hand Trip Lever (Cotton, Brushed Nickel, Matte Black, Polished Nickel)
- **ST472UR#01**
Tank and cover only with right-hand trip lever

COLORS/FINISHES

- #01 Cotton



TORNADO FLUSH



ONE GALLON PER FLUSH



UNIVERSAL HEIGHT



CEFIONTECT



SKIRTED DESIGN

PRODUCT SPECIFICATION

The two-piece ultra high-efficiency TORNADO FLUSH system toilet shall be 1.0 GPF (3.8 LPF). Toilet shall have CEFIONTECT ceramic glaze and be at Universal Height. Toilet shall have high-profile tank, elongated front bowl with SoftClose seat and Chrome trip lever. Toilet shall be TOTO Model MS472234CUFG#01.

CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC®), EPA WaterSense, State of Massachusetts, and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance, and others
- Complies with CA Prop 65 warning requirements



MS472234CUFG

Glaston™ 1G® Two-Piece Toilet - 1.0 GPF


SPECIFICATIONS

Water Use	1.0 GPF (3.8 LPF)
Flush System	TORNADO FLUSH®
Min. Water Pressure	8 psi (Flowing)
Water Surface	9" x 6-1/4"
Trap Diameter	2-1/8"
Rough-in	12" (10" & 14" Optional)
Trap Seal	2-1/8"
Warranty	One Year Limited Warranty
Material	Vitreous China
Shipping Weight	CT472CUFGT40 75 lbs
	ST472UA 31 lbs
Shipping Dimensions	CT472CUFGT40 29-7/16" L x 15-1/16" W x 18-3/8" H
	ST472UA 18-3/4" L x 8-1/2" W x 16-1/4" H

INSTALLATION NOTES

Back-to-Back Toilet Installations:


TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

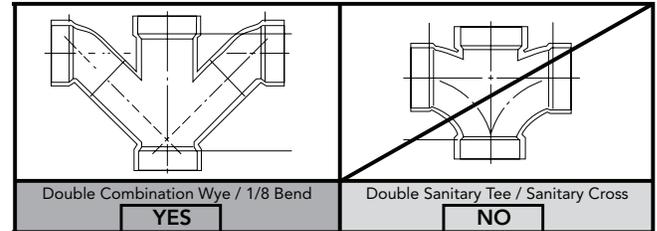

To maintain adequate wall gap between the back of the tank and wall, mount the floor flange at a nominal 12" rough-in distance.

It is recommended to have adequate supplemental flows from other water usage fixtures with a drain line slope of 2% with maximum linear runs of 60ft.

DIMENSIONS

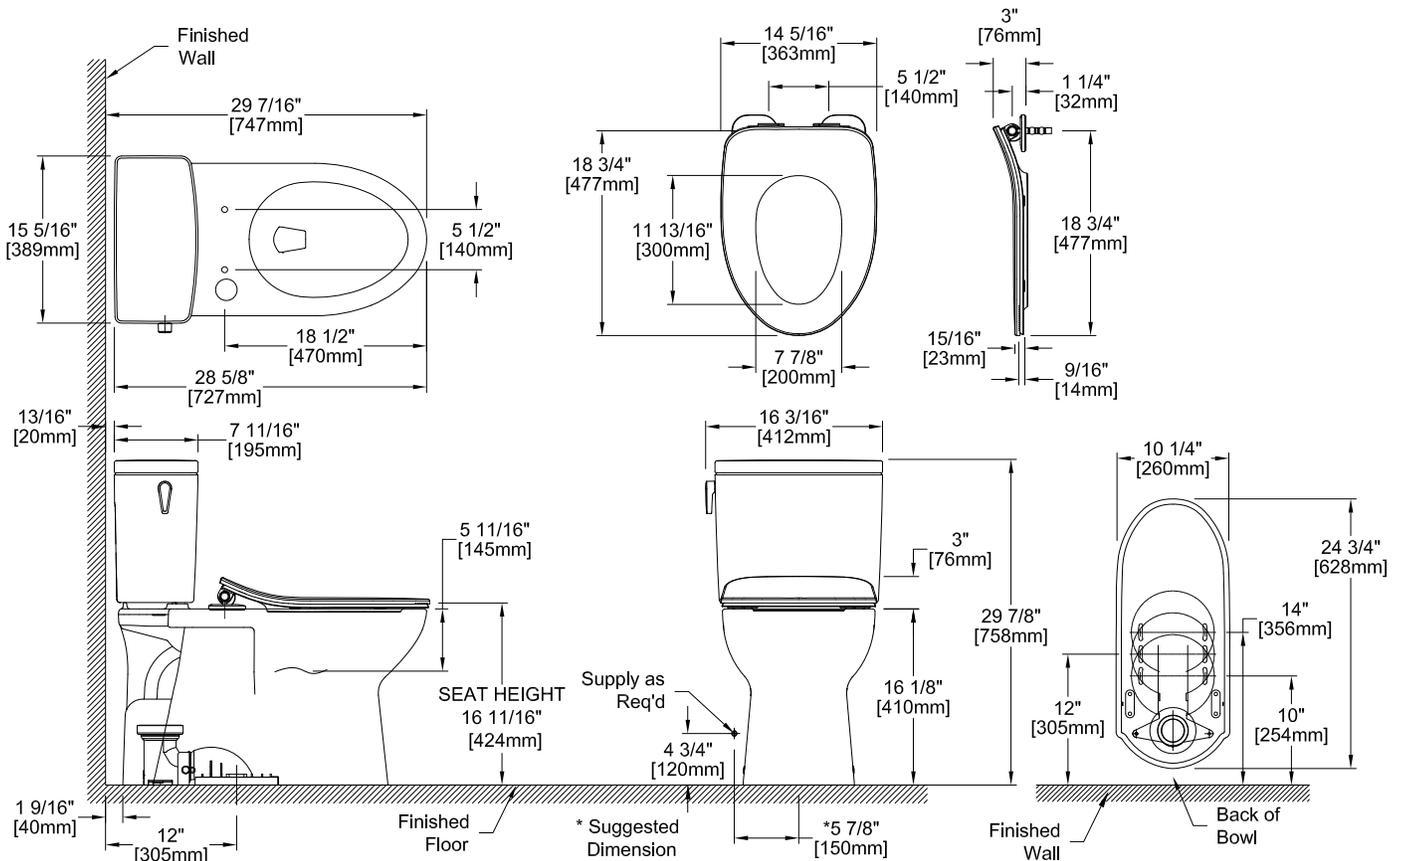

These dimensions and specifications are subject to change without notice