

RP WASHLET®+ RW Wall-Hung Toilet, 1.28 GPF & 0.9 GPF

FEATURES

RP Bowl

- DYNAMAX TORNADO FLUSH® system, high efficiency (1.28GPF/0.9GPF)
- CEFIONTECT® ceramic glaze minimizes waste from sticking to porous ceramic surfaces
- Universal Height

WASHLET+ RW

- Auto Flush
- Touchless auto open/close lid
- EWATER+® auto-cleans wand and bowl after every use
- PREMIST® automatically mists the bowl before each use
- Gentle aerated, warm water, front and rear spray with adjustable pressure and oscillating pulsating features
- Adjustable variable temperature for spray and seat
- Automatic air deodorizer
- Multifunction remote control with personalized memory settings for up to 4 users
- Warm air dryer with five variable temperature settings
- Night light illuminates the side and the inside of the bowl

DuoFit In-Wall Tank

- Dual flushing system, high-efficiency
- (1.28 GPF/4.8 LPF & 0.9 GPF/3.4 LPF) Avg. flush 1.1 GPF
- Adjustable 15"-19" mounting height
- Saves up to 9" of floor space compared to standard floor-mounted toilet
- Supports up to 880lbs
- Commercial 2" x 6" or optional residential installation with 2" x 4" wall studs with waste outlet kit

COMPONENTS

- **CT447CFGT60**
RP Wall-Hung Toilet
- **SW4547AT60(N)**WASHLET+ RW
- **WT173MA**
In-Wall Tank System (1.28 GPF/0.9 GPF)
- **YT930** – For #MS / **YT970** – For #MBL and #MW
Round Push Plate

Available Options

- **YT920 (#WH,#MS)**
Basic Square Push Plate – (White Matte, Matte Silver)
- **YT930 (#WH,#MS)**
Basic Round Push Plate – (White Matte, Matte Silver)
- **YT970 (#SS, #B, #W, #)**
Round Push Plate (Stainless Steel, Black, White, Nickel)
- **YT980 (#SS)**
Square Push Plate (Stainless Steel)



**DYNAMAX
TORNADO FLUSH**



SKIRTED DESIGN



CEFIONTECT



UNIVERSAL HEIGHT



AUTO FLUSH

COLOR/FINISHES

- **#MS**
Bowl and Washlet in #01 Cotton with YT930#MS
Matte Silver Push Plate

Made to Order

- **#MBL** Bowl and Washlet in #MBL Matte Black with
YT970#B Black Push Plate
- **#MW** Bowl and Washlet in #MW Matte White with
YT970#W White Push Plate

CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC®), EPA WaterSense, State of Massachusetts, and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance, and others
- ADA compliant
- Complies with CA Prop 65 warning requirements



CWT4474547CMFG(N)A


RP WASHLET®+ RW Wall-Hung Toilet, 1.28 GPF & 0.9 GPF

SPECIFICATIONS & INSTALLATION NOTES

	SW4547AT60
Power Rating	AC 120V-60Hz, 1282W
Flush System	2.95 ft/120 cm Length 3 Wire / 4 Pin Plug Harness
Water Feature (Flow Rates)	Rear: 9.1-14.5 oz/min
	Front: 9.8-14.5 oz/min
	Soft Rear: 9.1-14.5 oz min
Washing Spray Temp.	Min: 86°F/30°C Max: 104°F/40°C
Safety Device	Thermal Fuse
Air Dryer Temp.	Min: About 95°F/35°C Max: About 140°F/60°C
Dryer Air Capacity	10.24 fts/min
Seat Warming Temp.	Min: 82°F/28°C Max: 97°F/36°C
Water Supply Pressure	Min: 7.25 psi Max: 108.75 psi
Ambient Temp.	Min: 32°F/0°C Max: 104°F/40°C
Warranty	One Year Limited Warranty
Water Pressure	Min: 7.25 PSI (0.05MPa) Flowing Max: 108.75 PSI (0.75MPa) Static
Shipping Weight	16 lbs

DIMENSIONS

CT447CFGT60

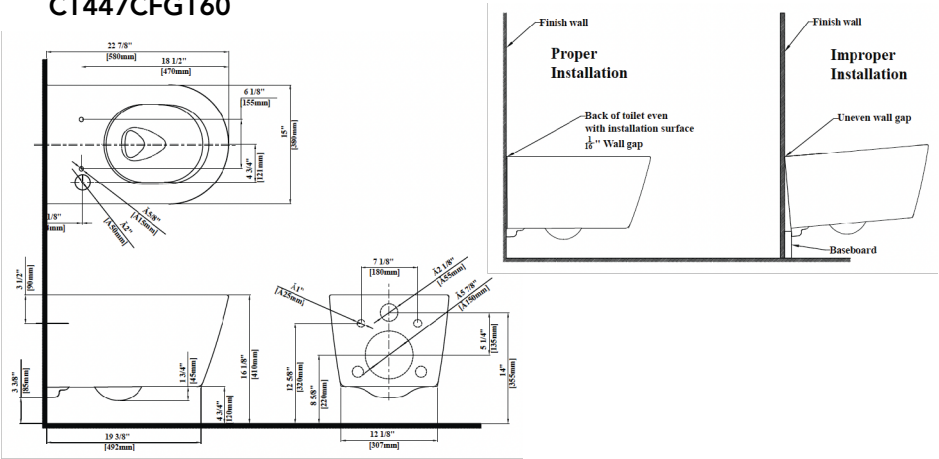

	CT447CFGT60	WT173MA
Water Use	1.28 GPF & 0.9 GPF (4.8 LPF & 3.4 LPF)	1.28 GPF & 0.9 GPF (4.8 LPF & 3.4 LPF)
Flush System	DYNAMAX TORNADO FLUSH	Dual-Max
Min. Water Pressure	8 psi (static)	8 psi (static)
Water Surface	5-1/2" X 4-1/8"	
Trap Diameter	2-1/8"	
Installation Height	15" to 19"	15" to 19"
Trap Seal	2-1/8"	
Warranty	One Year Limited	One Year Limited
Material	Vitreous China	Vitreous China
Shipping Weight	76 lbs.	43 lbs.
Shipping Dimensions	16" L x 14"W x 24" H	47-1/2" x 26" x 6"

CT447CFGT60

- This universal height, high efficiency DYNAMAX TORNADO flushing system toilet shall be 1.28 GPF/ 0.9 GPF (4.8 LPF / 3.4 LPF). Toilet shall have CEFIONTECT ceramic glaze. Toilet shall be mounted to in-wall tank system, elongated front bowl and wall-mounted push-button type trip lever. Toilet shall be TOTO Model CT447CFG_____.

RW WASHLET

- WASHLET RW may not fit certain toilet bowl designs
- If possible, with your order, please include your model number (from the underside of the tank lid)
- It is highly recommended to use a surge protector to prevent damage in the event of a power surge

DuoFit In-Wall Tank


- Adequate structural bracing is required

CWT4474547CMFG(N)A


RP WASHLET®+ RW Wall-Hung Toilet, 1.28 GPF & 0.9 GPF

DIMENSIONS


YT970

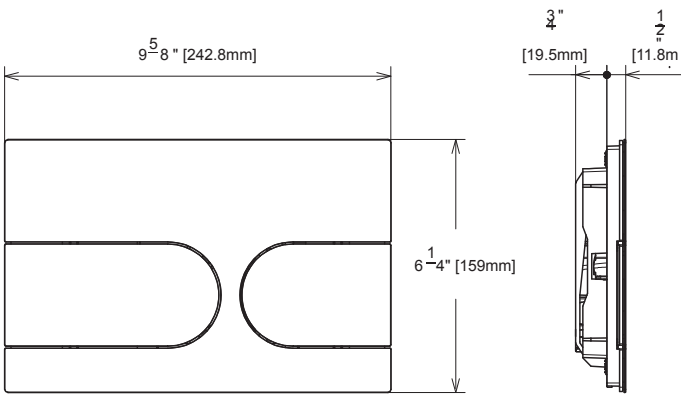

YT930

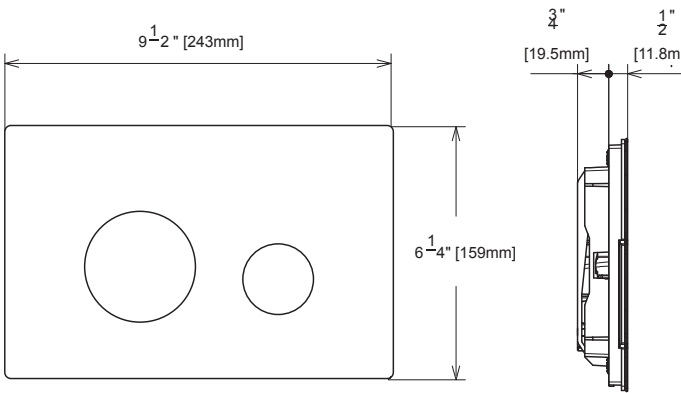

SW4547AT60

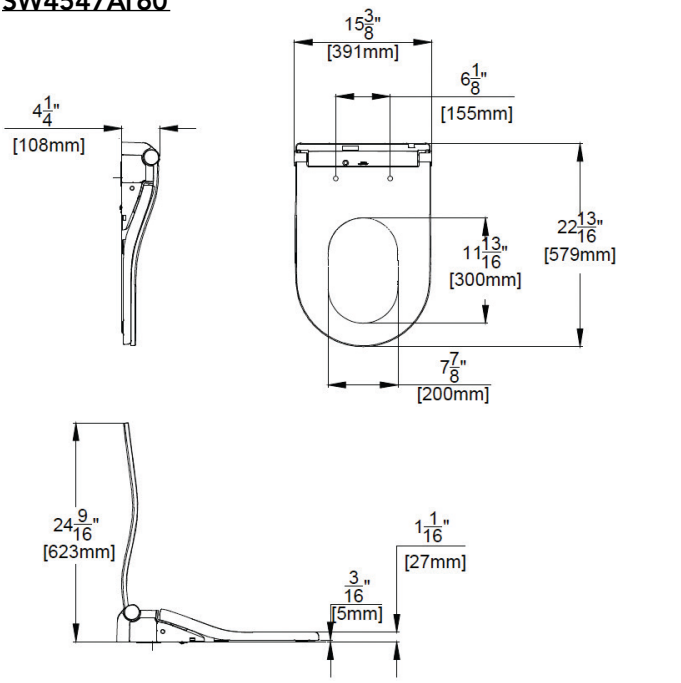

INSTALLATION NOTES

- This product is designed and evaluated based on the laws and technical standards of the Territory. Use outside the Territory may compromise safety and performance or violate local laws. Warranty, repairs, and technical support are not available for use outside the Territory.

WT173MA

