

SP WASHLET®+ SW Wall-Hung Toilet, 1.28 GPF & 0.9

FEATURES

SP Bowl

- DYNAMAX TORNADO FLUSH® system, high efficiency (1.28GPF/0.9GPF)
- CEFIONTECT® ceramic glaze minimizes waste from sticking to porous ceramic surfaces
- Universal Height

WASHLET+ SW

- Auto Flush
- Touchless auto open/close lid
- EWATER+® auto-cleans wand and bowl after every use
- PREMIST® automatically mists the bowl before each use
- Gentle aerated, warm water, front and rear spray with adjustable pressure and oscillating pulsating features
- Adjustable variable temperature for spray and seat
- Automatic air deodorizer
- Multifunction remote control with personalized memory settings for up to 4 users
- Warm air dryer with five variable temperature settings
- Night light illuminates the side and the inside of the bowl

DuoFit In-Wall Tank

- Dual flushing system, high-efficiency
- (1.28 GPF/4.8 LPF & 0.9 GPF/3.4 LPF) Avg. flush 1.1 GPF
- Adjustable 15"-19" mounting height
- Saves up to 9" of floor space compared to standard floor-mounted toilet
- Supports up to 880lbs
- Commercial 2" x 6" or optional residential installation with 2" x 4" wall studs with waste outlet kit

COMPONENTS

- **CT449CFGT60#01**
SP Wall-Hung Toilet
- **SW4549AT60N**
WASHLET+ SW
- **WT173MA**
In-Wall Tank System (1.28 GPF/0.9 GPF)
- **YT920#MS**
Matte Silver Basic Square Push Plate

Available Options

- **YT920 (#WH,#MS)**
Basic Square Push Plate – (White Matte, Matte Silver)
- **YT930 (#WH,#MS)**
Basic Round Push Plate – (White Matte, Matte Silver)
- **YT970 (#SS, #B, #W, #N)**
Round Push Plate (Stainless Steel, Black, White, Nickel)
- **YT980 (#SS)**
Square Push Plate (Stainless Steel)



**DYNAMAX
TORNADO FLUSH**



AUTO FLUSH



CEFIONTECT



SD SKIRTED DESIGN



U UNIVERSAL HEIGHT



EWATER+

COLORS/FINISHES

- **#MS**
Bowl and Washlet in #01 Cotton
with YT920#MS Matte Silver Push Plate

CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC®), EPA WaterSense, State of Massachusetts, and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance, and others
- ADA compliant
- Complies with CA Prop 65 warning requirements



CWT4494549CMFGNA

SP WASHLET®+ SW Wall-Hung Toilet, 1.28 GPF & 0.9 GPF


SPECIFICATIONS & INSTALLATION NOTES

	SW4549AT60
Power Rating	AC 120V-60Hz, 1282W
Power Cord	2.95 ft/120 cm Length 3 Wire / 4 Pin Plug Harness
Water Feature (Flow Rates)	Rear: 9.1-14.5 oz/min
	Front: 9.8-14.5 oz/min
	Soft Rear: 9.1-14.5 oz min
Washing Spray Temp.	Min: 86°F/30°C Max: 104°F/40°C
Safety Device	Thermal Fuse
Air Dryer Temp.	Min: About 95°F/35°C Max: About 140°F/60°C
Dryer Air Capacity	10.24 ft³/min
Seat Warming Temp.	Min: 82°F/28°C Max: 97°F/36°C
Water Supply Pressure	Min: 7.25 psi Max: 108.75 psi
Ambient Temp.	Min: 32°F/0°C Max: 104°F/40°C
Warranty	One Year Limited Warranty
Shipping Weight	20.3 lbs
Shipping Dimensions	26" L x 18" x 7-1/4"H

	CT449CFGT60	WT173MA
Water Use	1.28 GPF & 0.9 GPF (4.8 LPF & 3.4 LPF)	1.28 GPF & 0.9 GPF (4.8 LPF & 3.4 LPF)
Flush System	DYNAMAX TORNADO FLUSH®	Dual-Max®
Min. Water Pressure	8 psi (static)	8 psi (static)
Water Surface	5-1/2" X 4-1/8"	
Trap Diameter	2-1/8"	
Installation Height	15" to 19"	15" to 19"
Trap Seal	2-1/8"	
Warranty	One Year Limited Warranty	One Year Limited Warranty
Material	Vitreous China	Various
Shipping Weight	76 lbs.	43 lbs

DIMENSIONS

CT449CFGT60

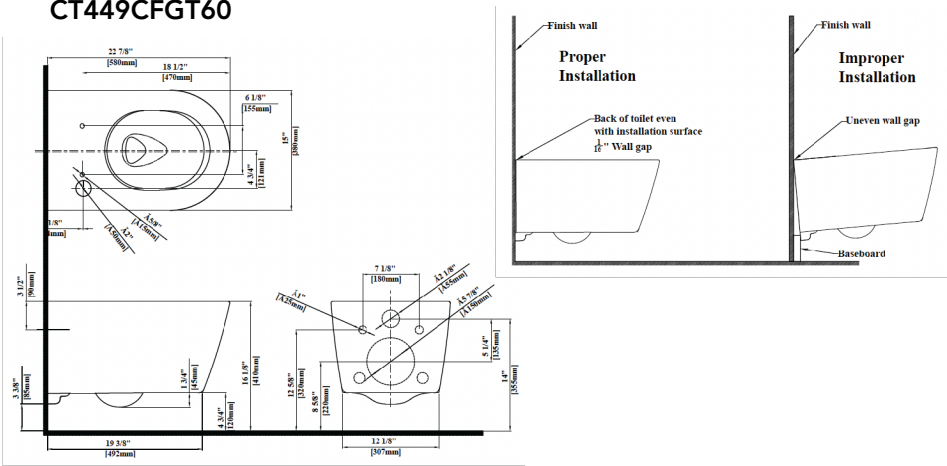

CT449CFGT60

- This universal height, high efficiency DYNAMAX TORNADO flushing system toilet shall be 1.28 GPF/ 0.9 GPF (4.8 LPF / 3.4 LPF). Toilet shall have CEFIONTECT® ceramic glaze. Toilet shall be mounted to in-wall tank system, elongated front bowl and wallmounted push-button type trip lever. Toilet shall be TOTO Model CT449CFG_____.

SW WASHLET

- WASHLET SW may not fit certain toilet bowl designs
- If possible, with your order, please include your model number (from the underside of the tank lid)
- It is highly recommended to use a surge protector to prevent damage in the event of a power surge


DuoFit In-Wall Tank

- Adequate structural bracing is required

CWT4494549CMFGNA

SP WASHLET®+ SW Wall-Hung Toilet, 1.28 GPF & 0.9 GPF


YT920

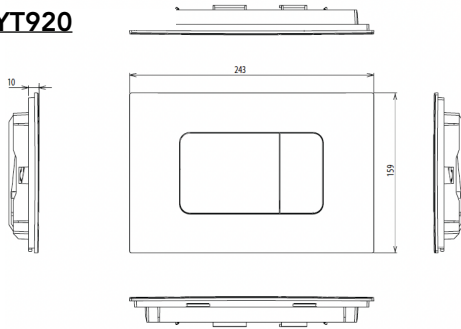

INSTALLATION NOTES

- This product is designed and evaluated based on the laws and technical standards of the Territory. Use outside the Territory may compromise safety and performance or violate local laws. Warranty, repairs, and technical support are not available for use outside the Territory.


SW4549AT60

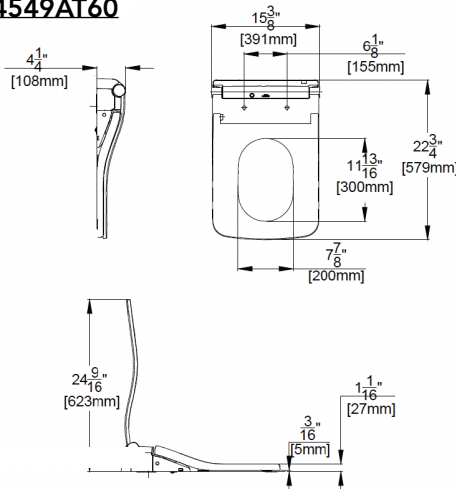

WT173MA

Frame Work

Follow wall framing code around the Carrier

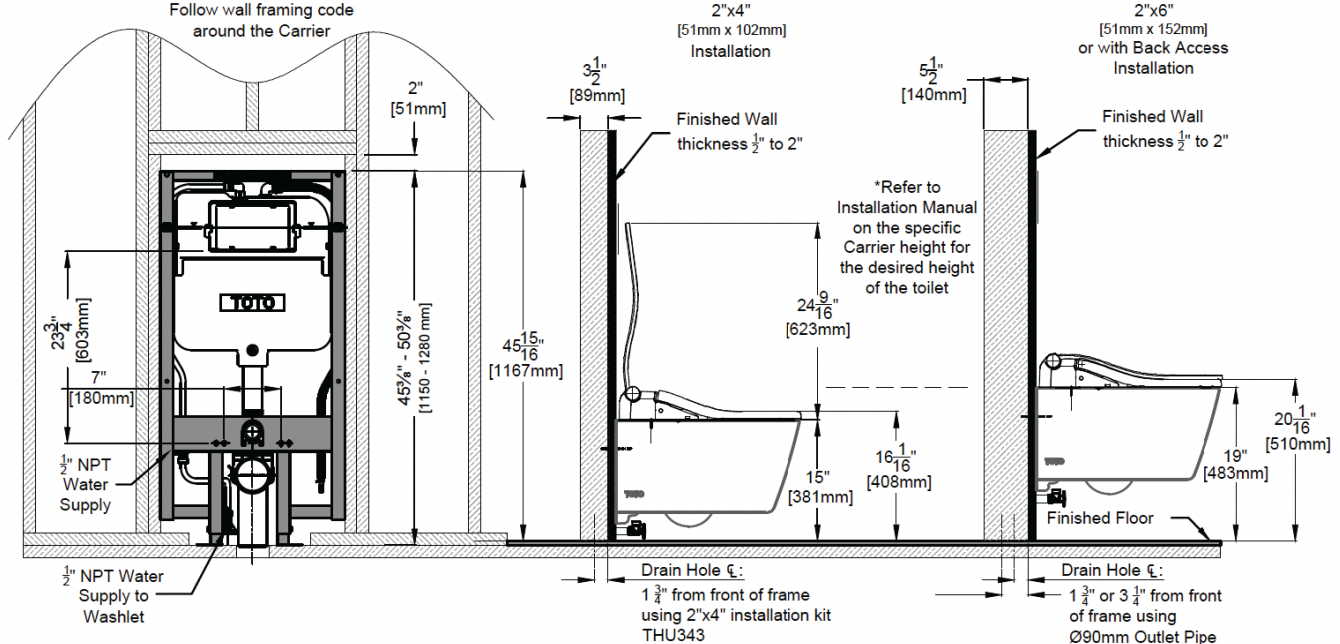

TOTO®

These dimensions and specifications are subject to change without notice