

Aurora™ WASHLET®+ S5 One-Piece Toilet - 1.0 GPF

FEATURES

- Concealed supply connection for seamless installation
- INTEGRALITY SYSTEM™ optimizes cleaning power through advanced water flow, ensuring an improved flush performance and enhanced bowl wash with our ultra high-efficiency TORNADO FLUSH® bowl design - 1.0 GPF (3.8 LPF)
- CEFIONTECT® ceramic glaze prevents debris and mold from sticking to ceramic surfaces
- Completely skirted design for a sleek and understated look that's easier to clean
- Chrome plated trip lever
- 12" Rough-in
- Elongated front bowl and WASHLET+ S5 set
- Touchless auto open/close lid
- EWATER+® auto-cleans wand after every use
- PREMIST® automatically mists the bowl before each use
- Self-cleaning wand cleans itself inside and out before and after every use
- CLEAN RESIN® keeps wand and seat cleaner, more hygienic, and effortless to maintain
- Multifunction pearl white block-style remote control
- Night light illuminates the side and the inside of the bowl



INTEGRALITY SYSTEM™



CEFIONTECT



TORNADO FLUSH



SKIRTED DESIGN



UNIVERSAL HEIGHT



EWATER+

MODELS

- **MW6863446CUFG (#01)**
With CEFIONTECT ceramic glaze, WASHLET+ S5 with contemporary design
 - **CST686CUFGAT40**
Elongated bowl with CEFIONTECT
 - **SW3446**
WASHLET+ S5

OPTIONAL COMPONENTS

- **TSU49.10**
10" Unifit Rough-in
- **TSU49.14**
14" Unifit Rough-In
- **THU897(#BN, #PN, #PB, #01, #MBL)-A**
Trip Lever (Brushed Nickel, Polished Nickel, Polished Brass, Cotton, Matte Black)

COLORS/FINISHES

- #01 Cotton

PRODUCT SPECIFICATION

The one-piece ultra high-efficiency INTEGRALITY SYSTEM toilet shall be 1.0 GPF (3.8 LPF). Toilet shall be 12" Unifit rough-in. Toilet shall have CEFIONTECT ceramic glaze and be at Universal Height. Toilet shall have elongated front bowl with SoftClose seat and Polished Chrome trip lever. Toilet shall be TOTO Model MW6863446CUFG#01.

See SW3446 Specification Sheet for details on included WASHLET.

CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC®), EPA WaterSense, State of Massachusetts, and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance, and others
- ADA compliant (when installed with trip lever located on the approach side)
- Complies with CA Prop 65 warning requirements



MW6863446CUFG

Aurora™ WASHLET®+ S5 Two-Piece Toilet - 1.0 GPF


SPECIFICATIONS

Water Use	1.28 GPF (4.8 LPF)
Flush System	INTEGRAL GRAVITY SYSTEM™
Min. Water Pressure	15 psi (Flowing) at 2.64 Gal/min
Water Surface	9" x 6-1/4"
Trap Diameter	2-1/2"
Rough-in	12" (10" and 14" options available)
Trap Seal	2-1/8"
Warranty	One Year Limited Warranty
Material	Vitreous China
Shipping Weight	CST686CUFGAT40: 132 lbs SW3446: 15.4 lbs
Shipping Dimensions	CST686CUFGAT40 30-7/8" L x 22-5/8" W x 18-1/2" H1 x 29" H2 SW3446 24-3/8" L x 17-9/16" W x 7-7/16" H

See SW3446 Specification Sheet for details on included WASHLET.

INSTALLATION NOTES


Back-to-Back Toilet Installations:
TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

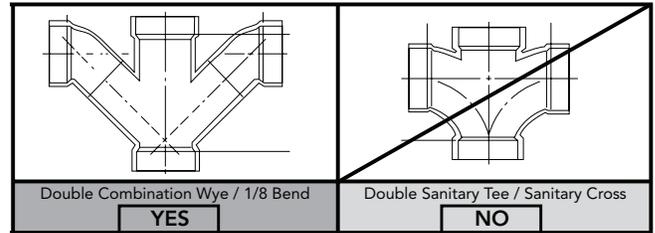

To maintain adequate wall gap between the back of the tank and wall, mount the floor flange at a nominal 12" rough-in distance.

It is recommended to have adequate supplemental flows from other water usage fixtures with a drain line slope of 2% with maximum linear runs of 60ft.

DIMENSIONS

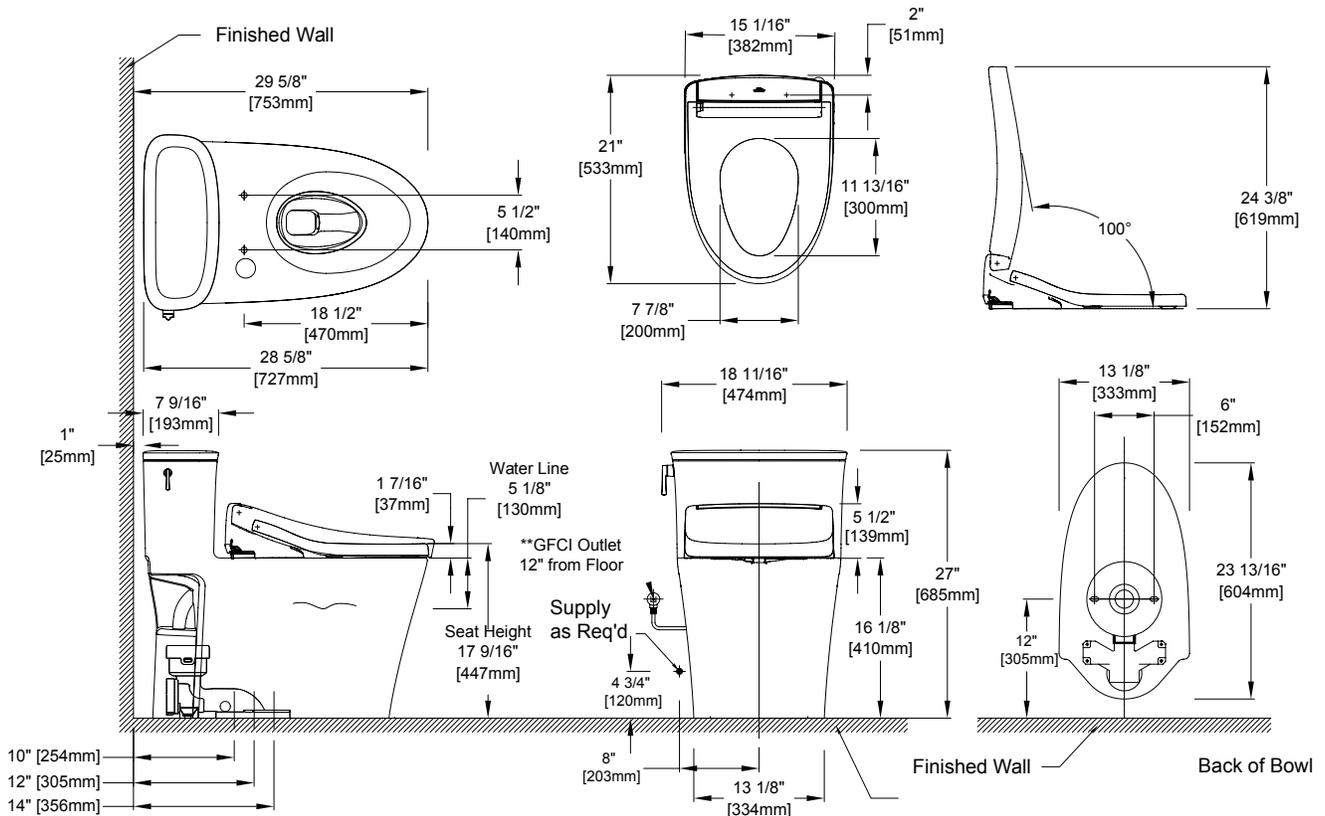

TOTO®

These dimensions and specifications are subject to change without notice