

# TOTO®

Perfection by Design

## CST714L Carusoe 1.6 GPF Toilet, Elongated (ADA Compliant)



CST714L - Carusoe Toilet ADA  
SS114 - SoftClose Seat



ST706

- ADA Compliant
- Ultra low 1.6 gallon flush
- Powerful flushing design
- Streamline tank design
- Large water surface

Two piece vitreous china elongated front gravity feed 1.6 Gpf toilet, complete. Includes tank fittings and bolt caps. ADA compliant.

Tank fittings included, complete with chrome-plated trip lever assembly.

■ **CST714L**  
Elongated, 12" rough-in, less seat

□ **C714L**  
Elongated front bowl only, 12" rough-in

□ **ST706**  
Streamline tank and cover only. Complete with tank trim & coupling components.

□ **SS114**  
SoftClose Seat and lid gently close with a touch of a hand. Elongated, closed front seat with lid.

□ **ST706B**  
Bolt down lid

□ **ST706D**  
Insulated tank

□ **ST706DB**  
Bolt down lid and insulated tank

*Colors:*

*Standard* #01 Cotton

*Optional* See price book for additional colors

*Trip Lever:*

*Standard* #CP Chrome Plated

*Optional* See price book for additional finishes



# CST714L

## Carusoe 1.6 GPF Toilet, Elongated (ADA Compliant)

### ■ PERFORMANCE

The TOTO 1.6 Gpf toilet received high ratings in independent laboratory performance tests. With a powerful and quiet flush design, the toilet also offers a large water surface.

### ■ SPECIFICATIONS

Water Use: 1.6 Gpf  
Flush System: Gravity Feed  
Min. Water Pressure: 8 psi  
Water Surface: **10" x 8-1/8"**  
Trap Diameter: 2-1/8"  
Rough-in: 12" rough-in  
Trap Seal: **2-1/4"**  
Warranty: Five Year Limited Warranty  
Material: Two piece Vitreous china bowl and tank

Shipping Weight: **C714L–Bowl** 53.5 lbs.  
**ST706–Tank** 32.5 lbs.

Shipping Dimensions: **C714L–Bowl**  
28-3/4"L x 10"W<sup>1</sup> x 16-3/8"W<sup>2</sup>  
x 18-7/8"H  
**ST706–Tank**  
20-1/8"L x 8-1/4"W x 15-1/2"H


*Fixture dimensions and hydraulic performance meet or exceed ANSI/ASME standard A112.19.2M and CAN/CSA B 45 requirements.*

*Listing / Approvals: IAPMO/UPC, CSA, City of Los Angeles, State of Massachusetts, and others*



*Meets the American Disabilities Act Guidelines and ANSI A117.1 requirements where installed so top of seat is 17" from the finished floor. Recommended seat for ADA requirements: TOTO model #SC514.*

*These dimensions and specifications are subject to change without notice.*

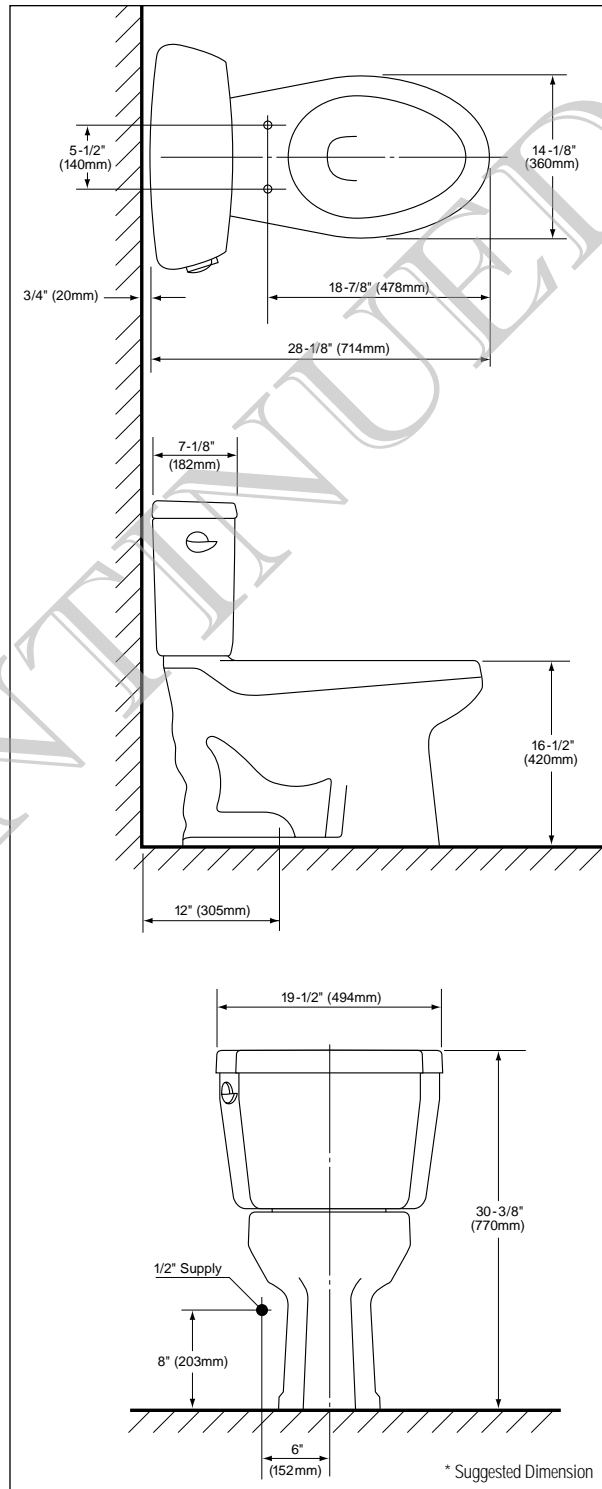

CST714L

**TOTO**<sup>®</sup>  
Perfection by Design

TOTO U.S.A., INC. • 1155 Southern Road, Morrow, GA 30260  
Tel. (770) 282-8686 • Fax. (770) 282-8701 • www.totousa.com  
Printed in U.S.A. © 1999 by TOTO LTD. 4/00