

Neorest® Combination Lavatory/Faucet

FEATURES

- 29-1/2" x 19-5/8" Self-rimming lavatory with mounting set and template
- Luxurious basin includes grid drain with cover
- Includes sensor faucet and control
- SanaGloss® ceramic glaze - prevents debris and mold from sticking to ceramic surfaces, leading to fewer chemicals and less water in cleaning



COLORS/FINISHES

- #01 Cotton
- #11 Colonial White
- #12 Sedona Beige

NEOREST®

CODES/STANDARDS

- Meets or exceeds ASME A112.19.2 / CSA B45.1
- Certifications: IAPMO(cUPC), State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- ADA Compliant



PRODUCT SPECIFICATION

The combination lavatory and faucet shall have mounting set and template, SanaGloss ceramic glaze. Product shall be a luxurious basin that includes grid drain with cover. Product shall also include sensor faucet and control. Product shall be TOTO Model LFC991G_____.





LFC991G

Neorest® Combination Lavatory/Faucet

SPECIFICATIONS

- Waste 1-1/4" O.D.
- Size 29-1/2" W x 19-5/8" D
- Basin 27-1/2" W x 14-5/8" D
- Warranty Auto Faucet : 1 year limited warranty on all component parts.
Lavatory: 1 year limited warranty
- Power supply 120V-240V AC, 50-60 Hz
- Hot/Cold-water supply Min:15PSI (when flowing),
Max: 125PSI
- Water supply connection 1/2" NPSM
- Discharge Quantity 1.7 GPM (6.5 l/min)
- Water Saving Function Automatically turns OFF after 60 seconds of continuous use.
Automatically turns OFF after 50 seconds if the continual water supply switch is left ON.
- Hand Sensor within 10" (250mm)
- Body Sensor within 3' (900mm)
- Detection time ON feature: Immediate
OFF feature: 1 second delay
- Material Fireclay (Lavatory)
Cast Brass (Faucet)
- Shipping Weight 61 lbs.
- Shipping Dimensions 30-7/8" W x 22" D
x 9-3/4" H

INSTALLATION NOTES

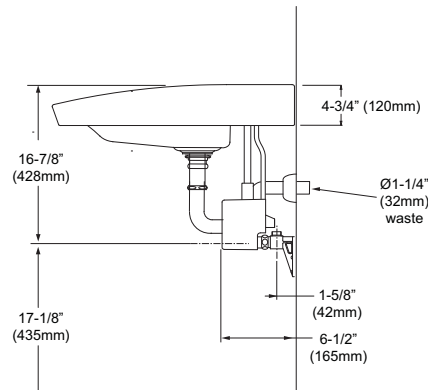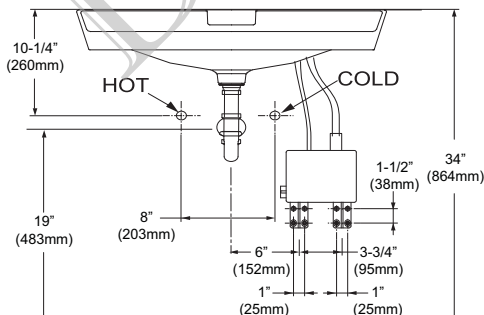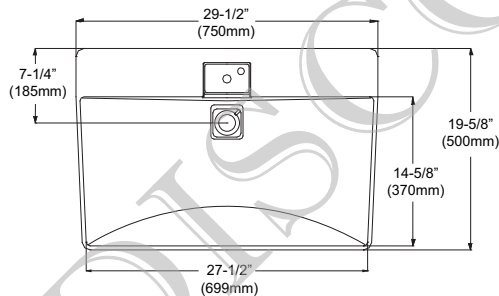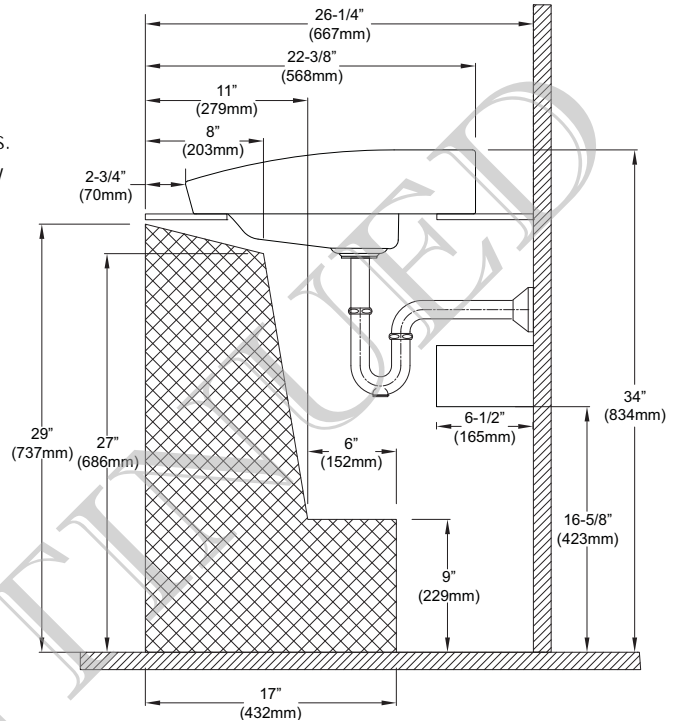

TOTO®

These dimensions and specifications are subject to change without notice