

# TOTO®

Perfection by Design

## CST704L 1.6 GPF Toilet, Elongated (ADA Compliant)



CST704L - 1.6 Gpf Toilet  
SS114 - SoftClose Toilet Seat

Colors:  
Standard #01 Cotton  
Optional See price book for additional colors

Trip Lever:  
Standard Color Matched  
Optional #CP Chrome Plated  
#PB Polished Brass



ST 703

- ADA Compliant
- Ultra-low 1.6 gallon flush
- Powerful flushing design

Two piece vitreous china elongated front gravity feed 1.6 Gpf toilet, complete. Includes tank fittings and bolt caps, less seat. ADA compliant.

Tank fittings included, complete with color matched trip lever assembly.

- **CST704L**  
Elongated, 12" rough-in.

- **C704L**  
Elongated front bowl only, 12" rough-in.

- **ST703**  
Tank and cover, complete with tank and trim coupling components.

- **ST703R**  
Tank and cover, complete with tank and trim coupling components with right hand trip lever.

- **SS114**  
SoftClose Seat and lid gently close with a touch of a hand. Elongated, closed front seat with lid.

- **SC104**  
Elongated, open front seat with lid.

- **SC504**  
Elongated, open front, premium design seat less lid.

- **SC514**  
Elongated, open front seat less lid.



# CST704L

## 1.6 GPF Toilet, Elongated (ADA Compliant)

### ■ PERFORMANCE

The TOTO 1.6 Gpf ADA toilet scored high ratings on ANSI/ASME testing at independent test laboratories. Designed for a powerful and quiet flush, the toilet also offers a large water surface.

### ■ SPECIFICATIONS

Water Use: 1.6 Gpf  
 Flush System: Gravity Feed  
 Min. Water Pressure: 8 psi  
 Water Surface: 8" x 9-1/2"  
 Trap Diameter: 1-7/8"  
 Rough-in: 12" rough-in  
 Trap Seal: 2-1/8"  
 Warranty: One Year Limited Warranty  
 Material: Vitreous china bowl and tank

Shipping Weight: **C704L–Bowl** 53.5 lbs.  
**ST703 / ST703R–Tank** 32 lbs.

Shipping Dimensions: **C704L–Bowl**  
 28-3/4"L x 10"W<sup>1</sup>  
 x 16-3/8"W<sup>2</sup> x 18-7/8"H

**ST703 / ST703R–Tank**  
 18-1/8"L x 8-1/4"W x 15-1/2"H


*Fixture dimensions and hydraulic performance meet or exceed ANSI/ASME standard A112.19.2M and CAN/CSA B 45 requirements.*

*Listing / Approvals: IAPMO/UPC, CSA, City of Los Angeles, State of Massachusetts, and others.*



*Meets the American Disabilities Act Guidelines and ANSI A117.1 requirements where installed so top of seat is 17" from the finished floor. Recommended seat for ADA requirements: TOTO model #SC514.*

*These dimensions and specifications are subject to change without notice.*

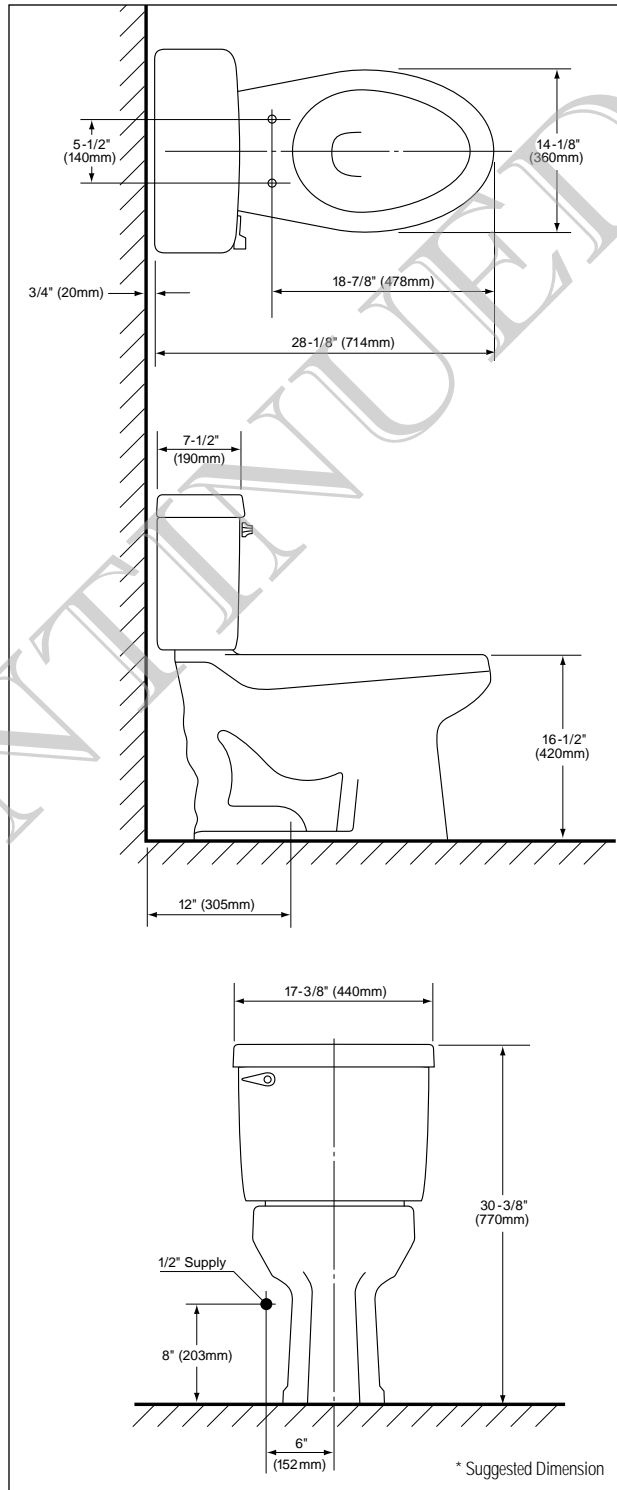

CST 704L