TOTO_®

MW454584CEFG

Drake[®] II / WASHLET[®]+ S350e Two-Piece Toilet - 1.28 GPF

FEATURES

- Concealed supply connection for seamless installation
- High-efficiency Tornado Flush® (1.28GPF/4.8LPF)
- CeFiONtect® glaze prevents debris from sticking to ceramic surfaces for easy cleaning
- Universal Height
- Elongated front bowl
- Chrome trip lever
- 12" Rough-in, less supply
- Auto open/close lid
- See Spec sheet SW584T20 for Washlet features

MODELS

- C454CUFGT20 Bowl with CeFiONtect glaze
- ST454E Tank and cover only
- ST454ER Tank and cover only, right hand trip lever

REQUIRED WASHLET+

SW584T20 WASHLET®+ S350e
 Fits TOTO WASHLET+ toilet bowl models only

COLORS/FINISHES

Standard #01 Cotton

PRODUCT SPECIFICATION

The two-piece high-efficiency Tornado Flush toilet shall be 1.28GPF/4.8LPF.

Universal Height Toilet with CeFiONtect glaze finish. Toilet shall have high-profile tank, elongated front bowl and chrome trip lever.

Toilet shall be TOTO Model C454CUFGT20#01.

See TOTO Specification sheet **SW584T20** for details on required Washlet.



CeFiONtect

washLė́T_®+



Tornado Flush

_ewater+,

CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC), EPA WaterSense, State of Massachusetts , City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California AB715,
 California Green Building Code, City of Los
 Angeles Water Efficiency Ordinance
- ADA compliant (when installed with trip lever located on the approach side)







Drake® II / WASHLET®+ S350e Two-Piece Toilet - 1.28 GPF

SPECIFICATIONS

Water Use
Flush System
Min. Water Pressure
Water Surface
Trap Diameter
Rough-in
1.28 GPF/4.8LPF
B psi (static)
7-1/8" x 9-1/8"
2-1/8"
Trap Seal
1.28 GPF/4.8LPF
2 psi (static)
7-1/8" x 9-1/8"

Warranty
 One Year Limited Warranty

Material Vitreous china

 Shipping Weight C454CUFGT20 57.3lbs. ST454E(R) 31.5lbs.

SW584T20 13.5lbs.

Shipping Dimensions C454CUFGT20

29" L X 14-3/4" W1 X 11-1/2" W2 X 16-1/4" H

ST454E(R)

18" L X 9" W X 16" H


SW584T20

23"X 19-1/4" X 5-1/2"


INSTALLATION NOTES

Back-to-Back Toilet Installations:

TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.



To maintain adequate wall gap between the back of the tank and wall, mount the floor flange at a nominal 12" rough-in distance.

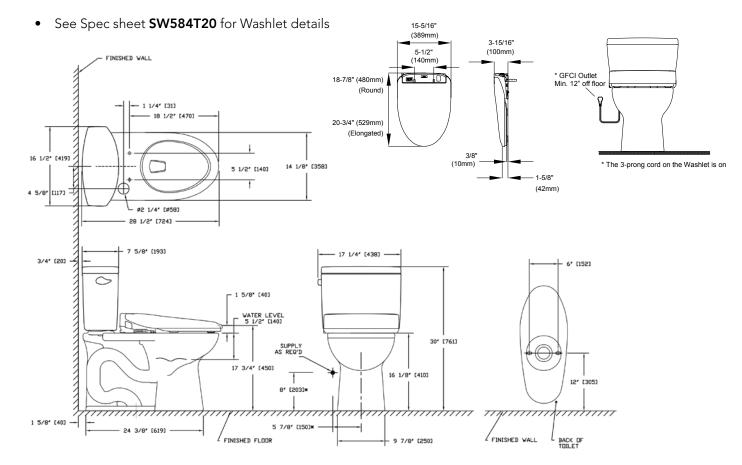

TOTO

≭SUGGESTED DIMENSIONS

These dimensions and specifications are subject to change without notice