

Thermostatic Mixing Valve Trim - Square

FEATURES

- For use with MiniUnit™ (TBN01001U)
- Temperature control trim with anti-scald safety stop
- Unobtrusive twist assist for a clean aesthetic
- ASSE certified Safety Thermo™ (SMA) Thermostatic Mixing Valve
- Requires volume control valve or positive shut off valve
- For use with showerheads rated at 1.75 gpm (6.6 lpm) or higher

COLORS/FINISHES

- #CP Polished Chrome
- #BN Brushed Nickel

Made to Order

- #PN Polished Nickel
- #PFG Polished French Gold
- #PBR Polished Bronze
- #MBL Matte Black

OPTIONAL ACCESSORIES

- THP5468 (###)
Volume Control or Diverter Trim ADA Handle

Accessory COLORS/FINISHES

Optional accessory is available to match COLORS/FINISHES section above

PRODUCT SPECIFICATION

Product shall be TOTO Model TBV02401U#____.
Product shall require TBN01001U MiniUnit (sold separately). Product shall be a temperature control valve and trim with anti-scald safety stop. Product shall be ASSE certified.



Safety Thermo™ (SMA)

CODES/STANDARDS

- Meets or exceeds ASSE 1016/ASME A112.1016/CSA B125.16, ASME A112.18.1/CSA B125.1
- Certifications: IAPMO(cUPC), State of Massachusetts, City of Los Angeles, and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others



TBV02401U

Thermostatic Mixing Valve Trim - Square


SPECIFICATIONS

Material	Brass
Warranty	Limited Lifetime (Residential Use) One Year (Commercial Use)
Shipping Weight	6.0 lbs
Shipping Dimensions	12" x 8-1/2" x 6-3/8"



INSTALLATION NOTES

Requires TBN01001U MiniUnit (sold separately).

Shower installation will also require a separate valve & trim with positive shut-off (i.e. Volume control or diverter with off).

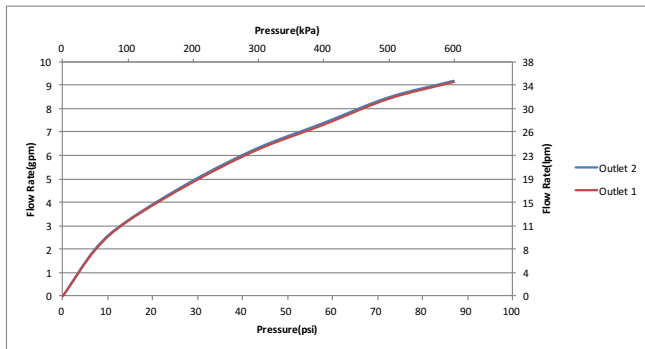

DIMENSIONS

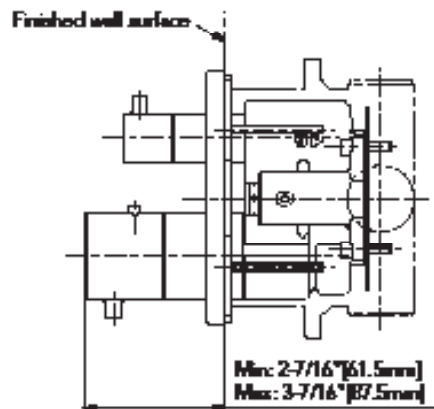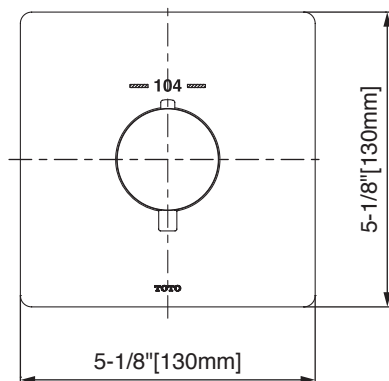

TOTO

Ph: (888) 295-8134 | Fax: (800) 699-4889 | www.totousa.com | © TOTO USA

These dimensions and specifications are subject to change without notice

#SS-01299 v.03